STEREO INTEGRATED AMPLIFIER

KA-2050R/3050R

SERVICE MANUAL

KENWOOD

©1992-6 PRINTED IN JAPAN
B51-4546-00 (S) 2349

(KA-2050R)

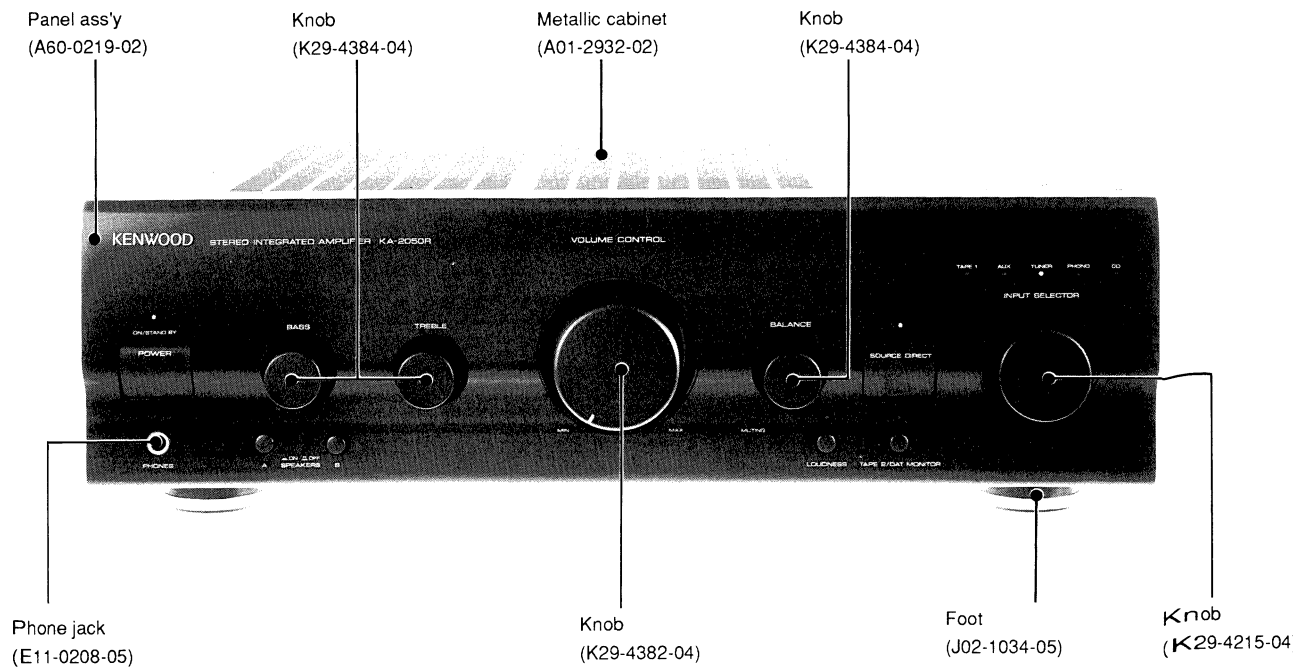

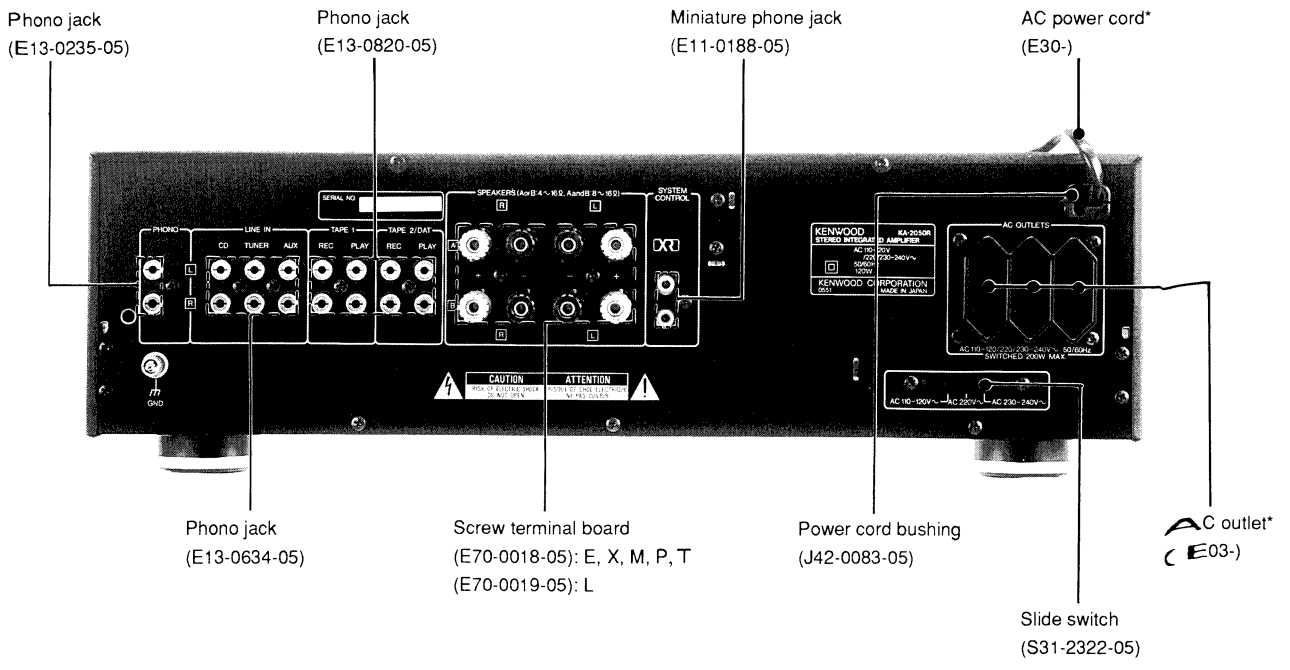

* Refer to parts list page 17.

KA-2050R/3050R

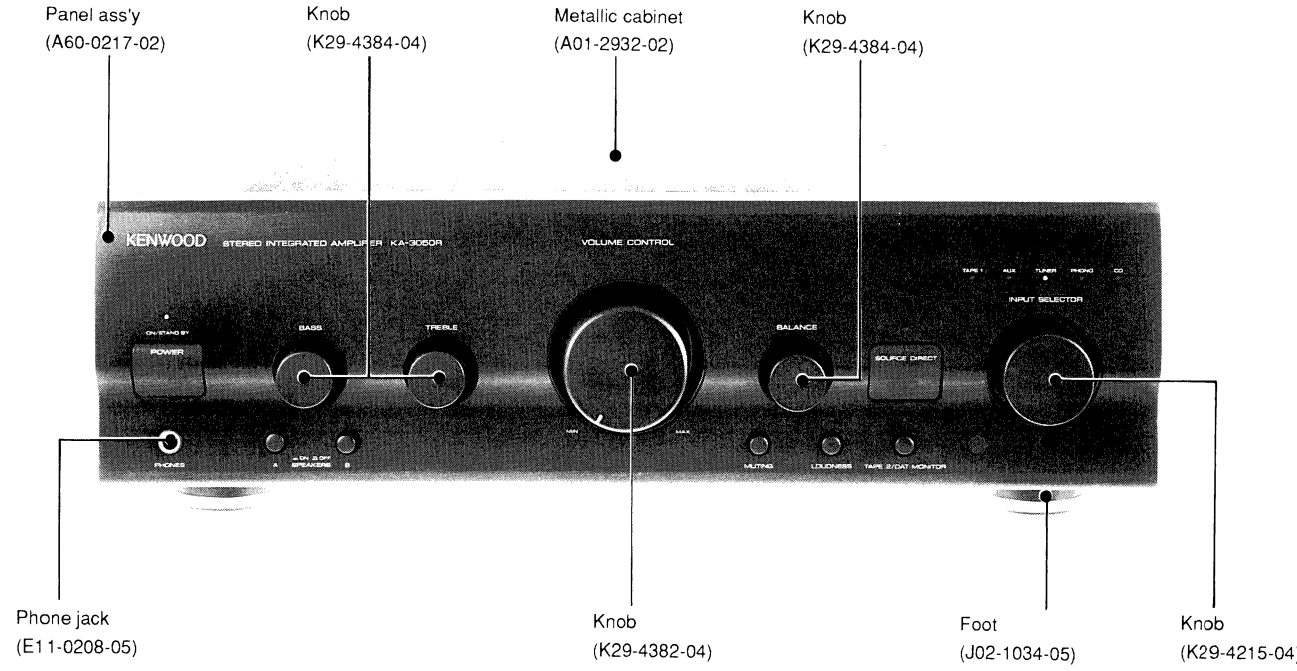

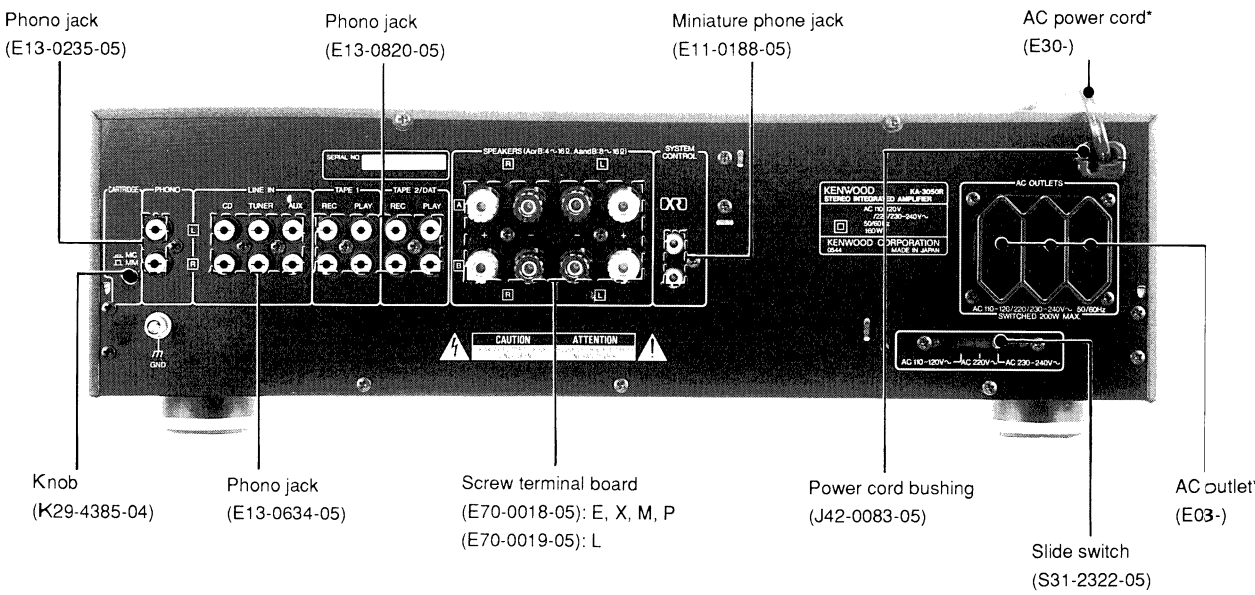

* Refer to parts list on page 17.

Accessories

- Remote control unit 1



(A70-0597-05)
(A09-0094-08) : Batterry cover

- Batteries (R03/UM-4/ "AAA") 2



- AC plug adaptor 1
(Except for some areas)
For the unit with a European AC plug in areas other than Europe.



(E03-0115-05)

ADJUSTMENT/REGLAGES/ABGLEICH

ADJUSTMENT

No.	ITEM	INPUT SETTINGS	OUTPUT SETTINGS	AMPLIFIER SETTING	ALIGNMENT POINTS	ALIGN FOR	FIG.
	Unless otherwise specified, set the respective switches as follows: POWER: ON SPEAKER: B REC OUT: OFF SELECTOR: PHONO						
1	IDLE CURRENT	–	Connect a DC voltmeter across CP1 (L) CP2 (R) (X09-)	VOLUME: 0	VR1 (L) VR2 (R) (X09-)	8.8 mV	(a)

REGLAGES

N	ITEM	REGLAGE DE L'ENTREE	REGLAGE DE LA SORTIE	REGLAGE DE L'AMPLIFICATEUR	POINTS DE L'ALIGNMENT	ALIGNER POUR	FIG.
	Sauf indicationcontraire, régler comme suit les commandes respectives: POWER:ON SPEAKER: B REC OUT: OFF SELECTOR:PHONO						
1	COURANT DE POLARISATION	–	Connecter un voltmètre de CC SUR CP1 (G) CP2 (D) (X09-)	VOLUME: 0	VR1 (G) VR2 (D) (X09-)	8.8 mV	(a)

ABGLEICH

NR.	GENGENSTAND	EINGANGS-EINSTELLUNG	AUSANG-EINSTELLUNG	VORSTÄRKER-EINSTELLUNG	ABGLEICHE-PUNKTE	ABGLEICHEN FÜR	ABB.
	Wenn nicht anders angegeben, die einzelnen Schalter wie folgt einstellen: POWER: ON SPEAKER: B REC OUT: OFF SELECTER: PHONO						
1	LEERLAUFSTROM	–	Einen Gleichspannungs-messer über CP1 (L) CP2 (R) anschließen. (X09-)	VOLUME: 0	VR1 (L) VR2 (R) (X09-)	8.8 mV	(a)

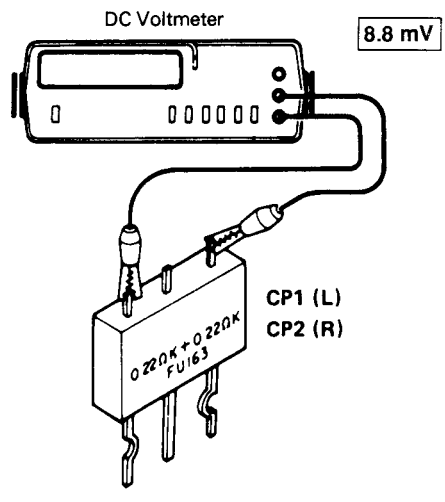

(a)

WIRING DIAGRAM

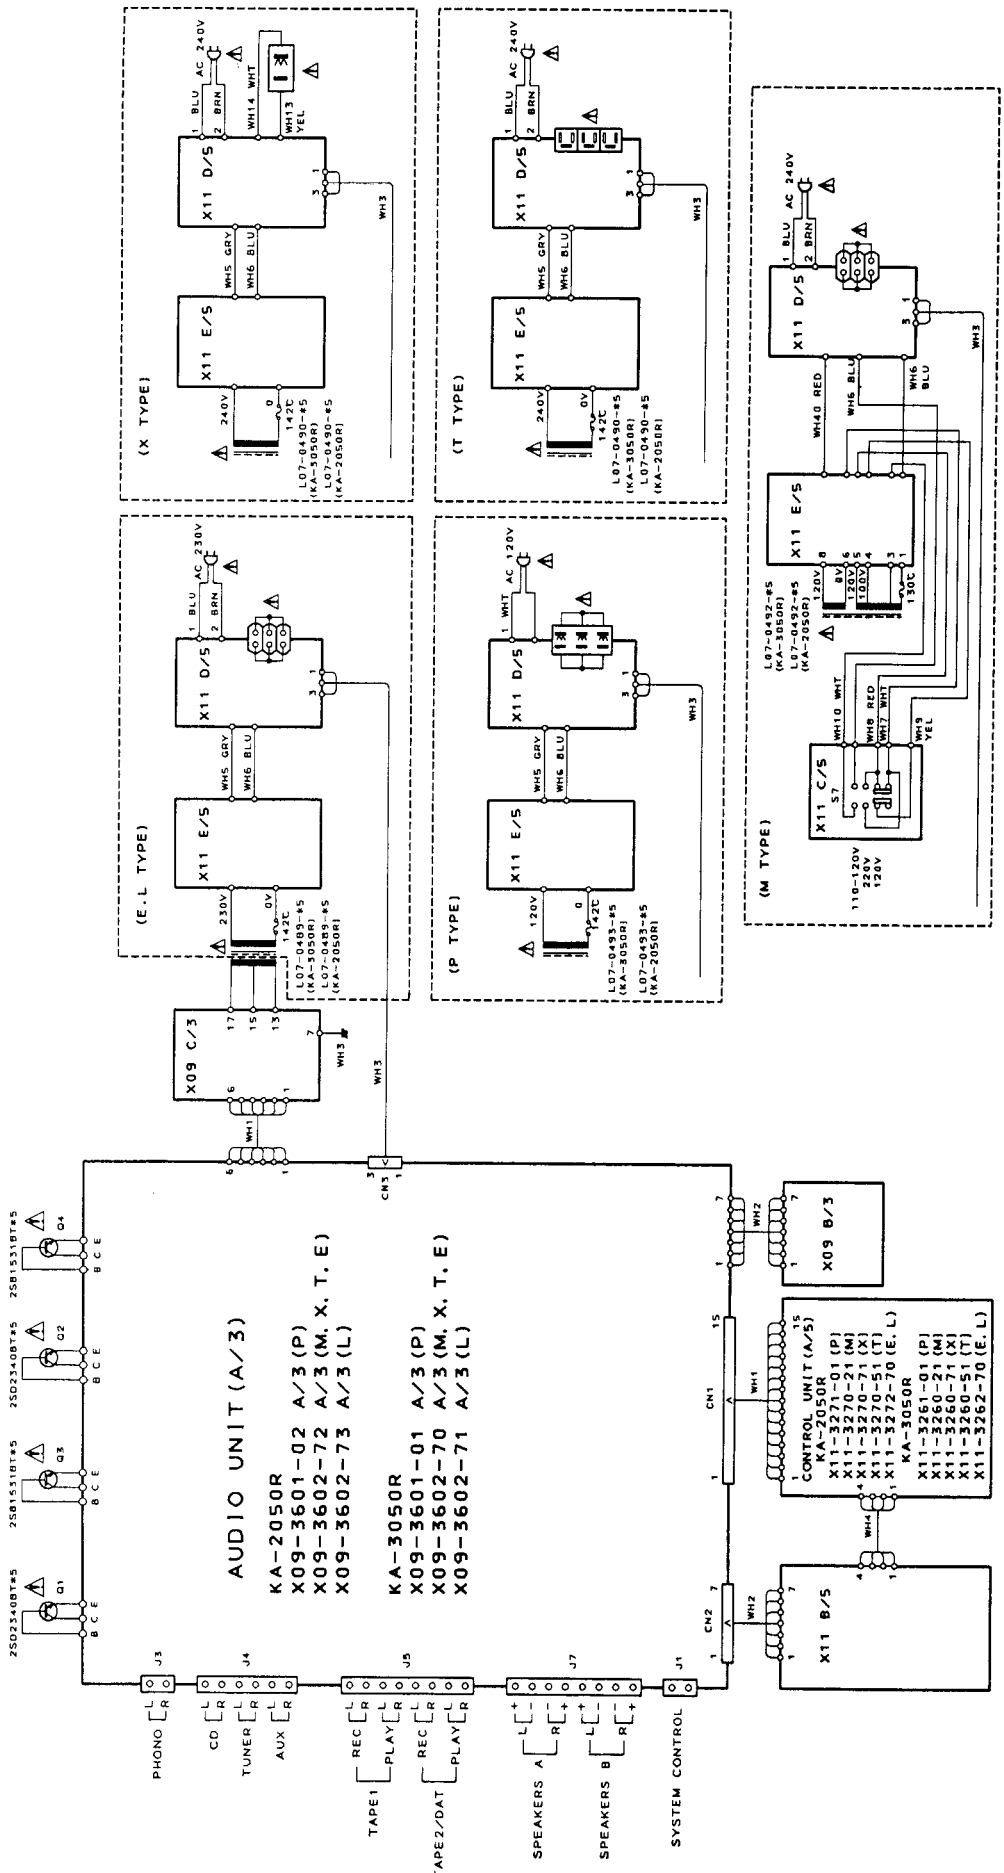

PC BOARD (Component side view)

AUDIO UNIT

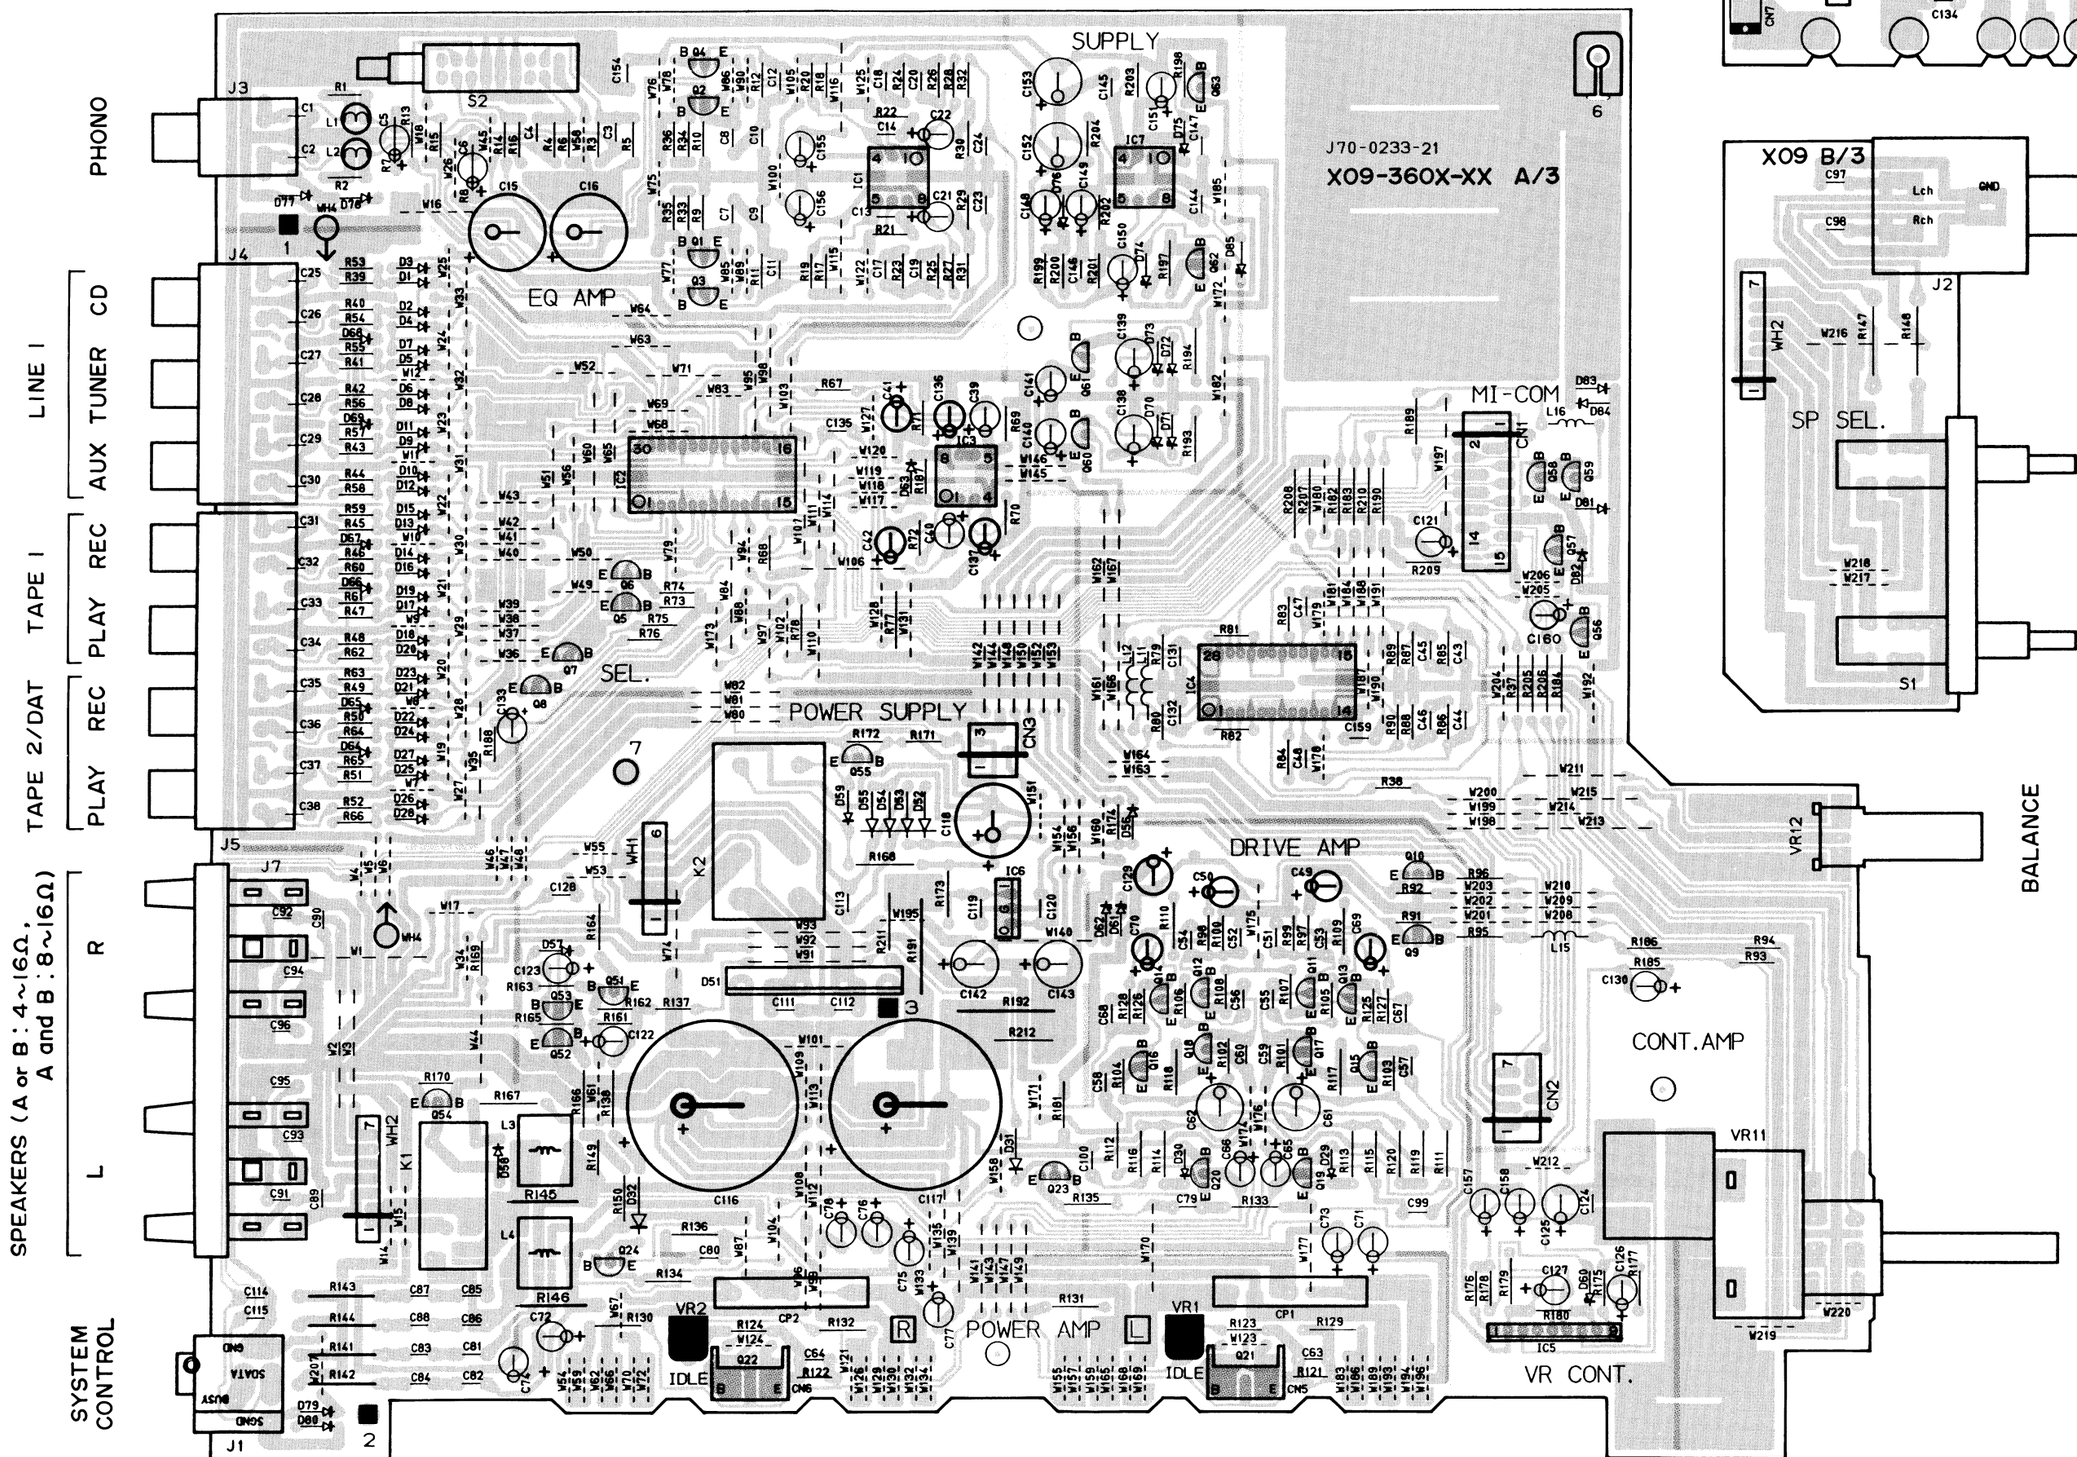

Refer to the schematic diagram for the values of resistors and capacitors

PC BOARD (Component side view)

CONTROL UNIT

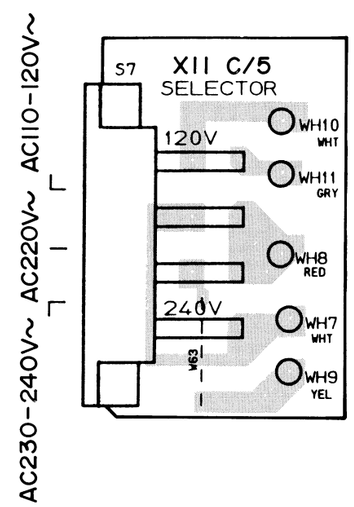

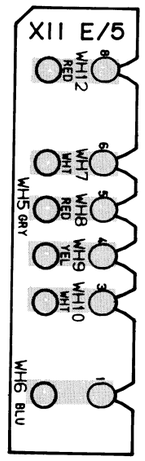

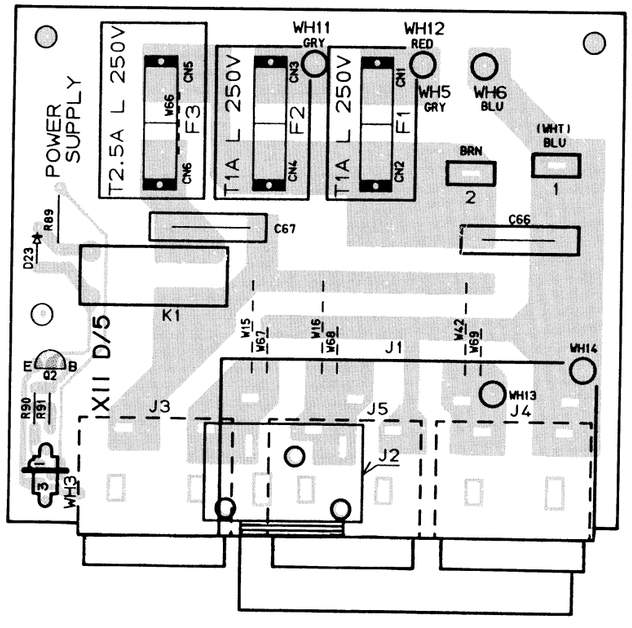

AC110-120/220/230-240V~ 50/60Hz
SWITCHED 200W MAX

AC OUTLETS

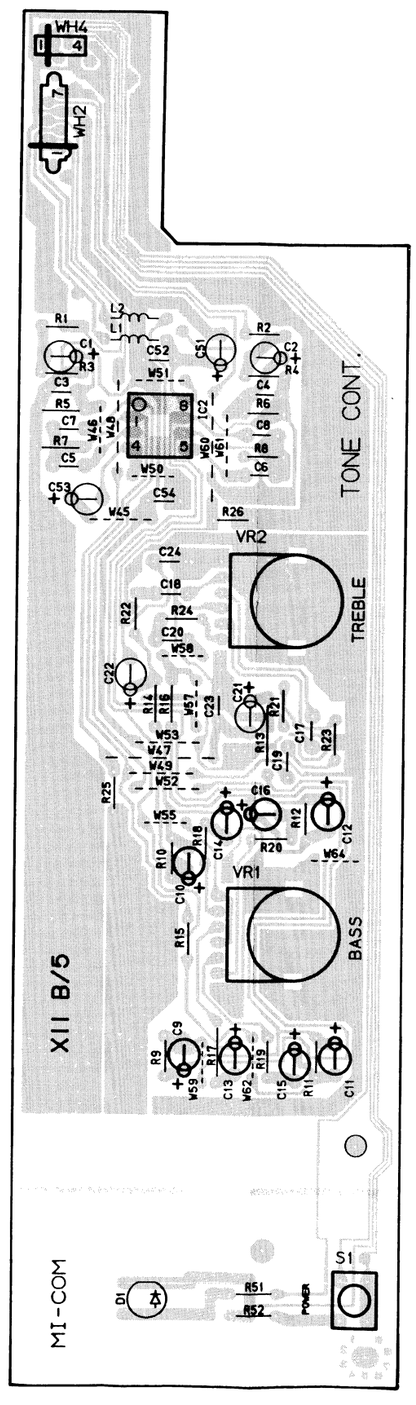

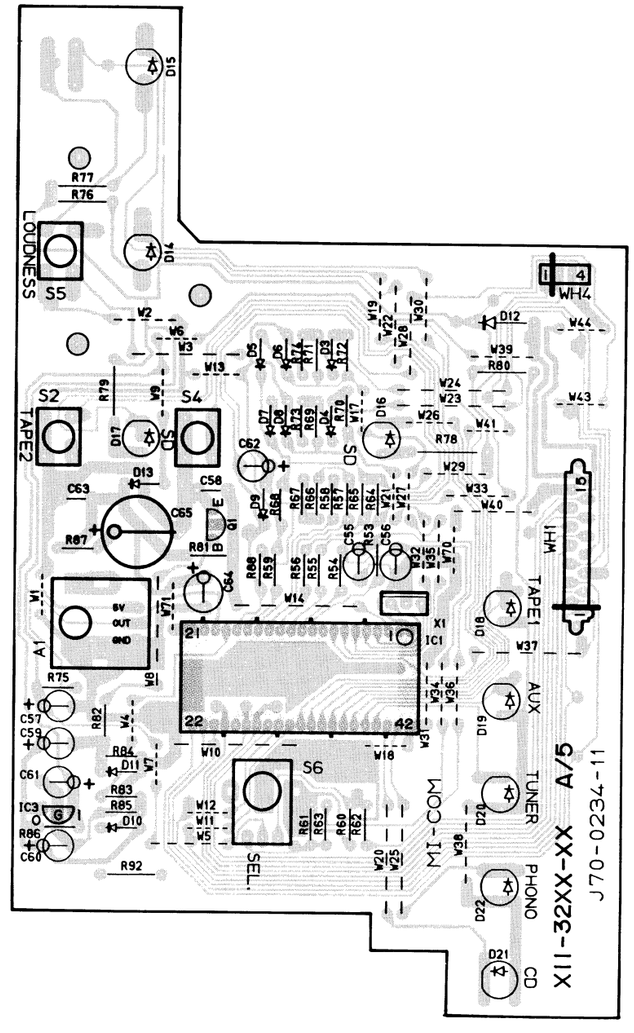

Refer to the schematic diagram for the values of resistors and capacitors.

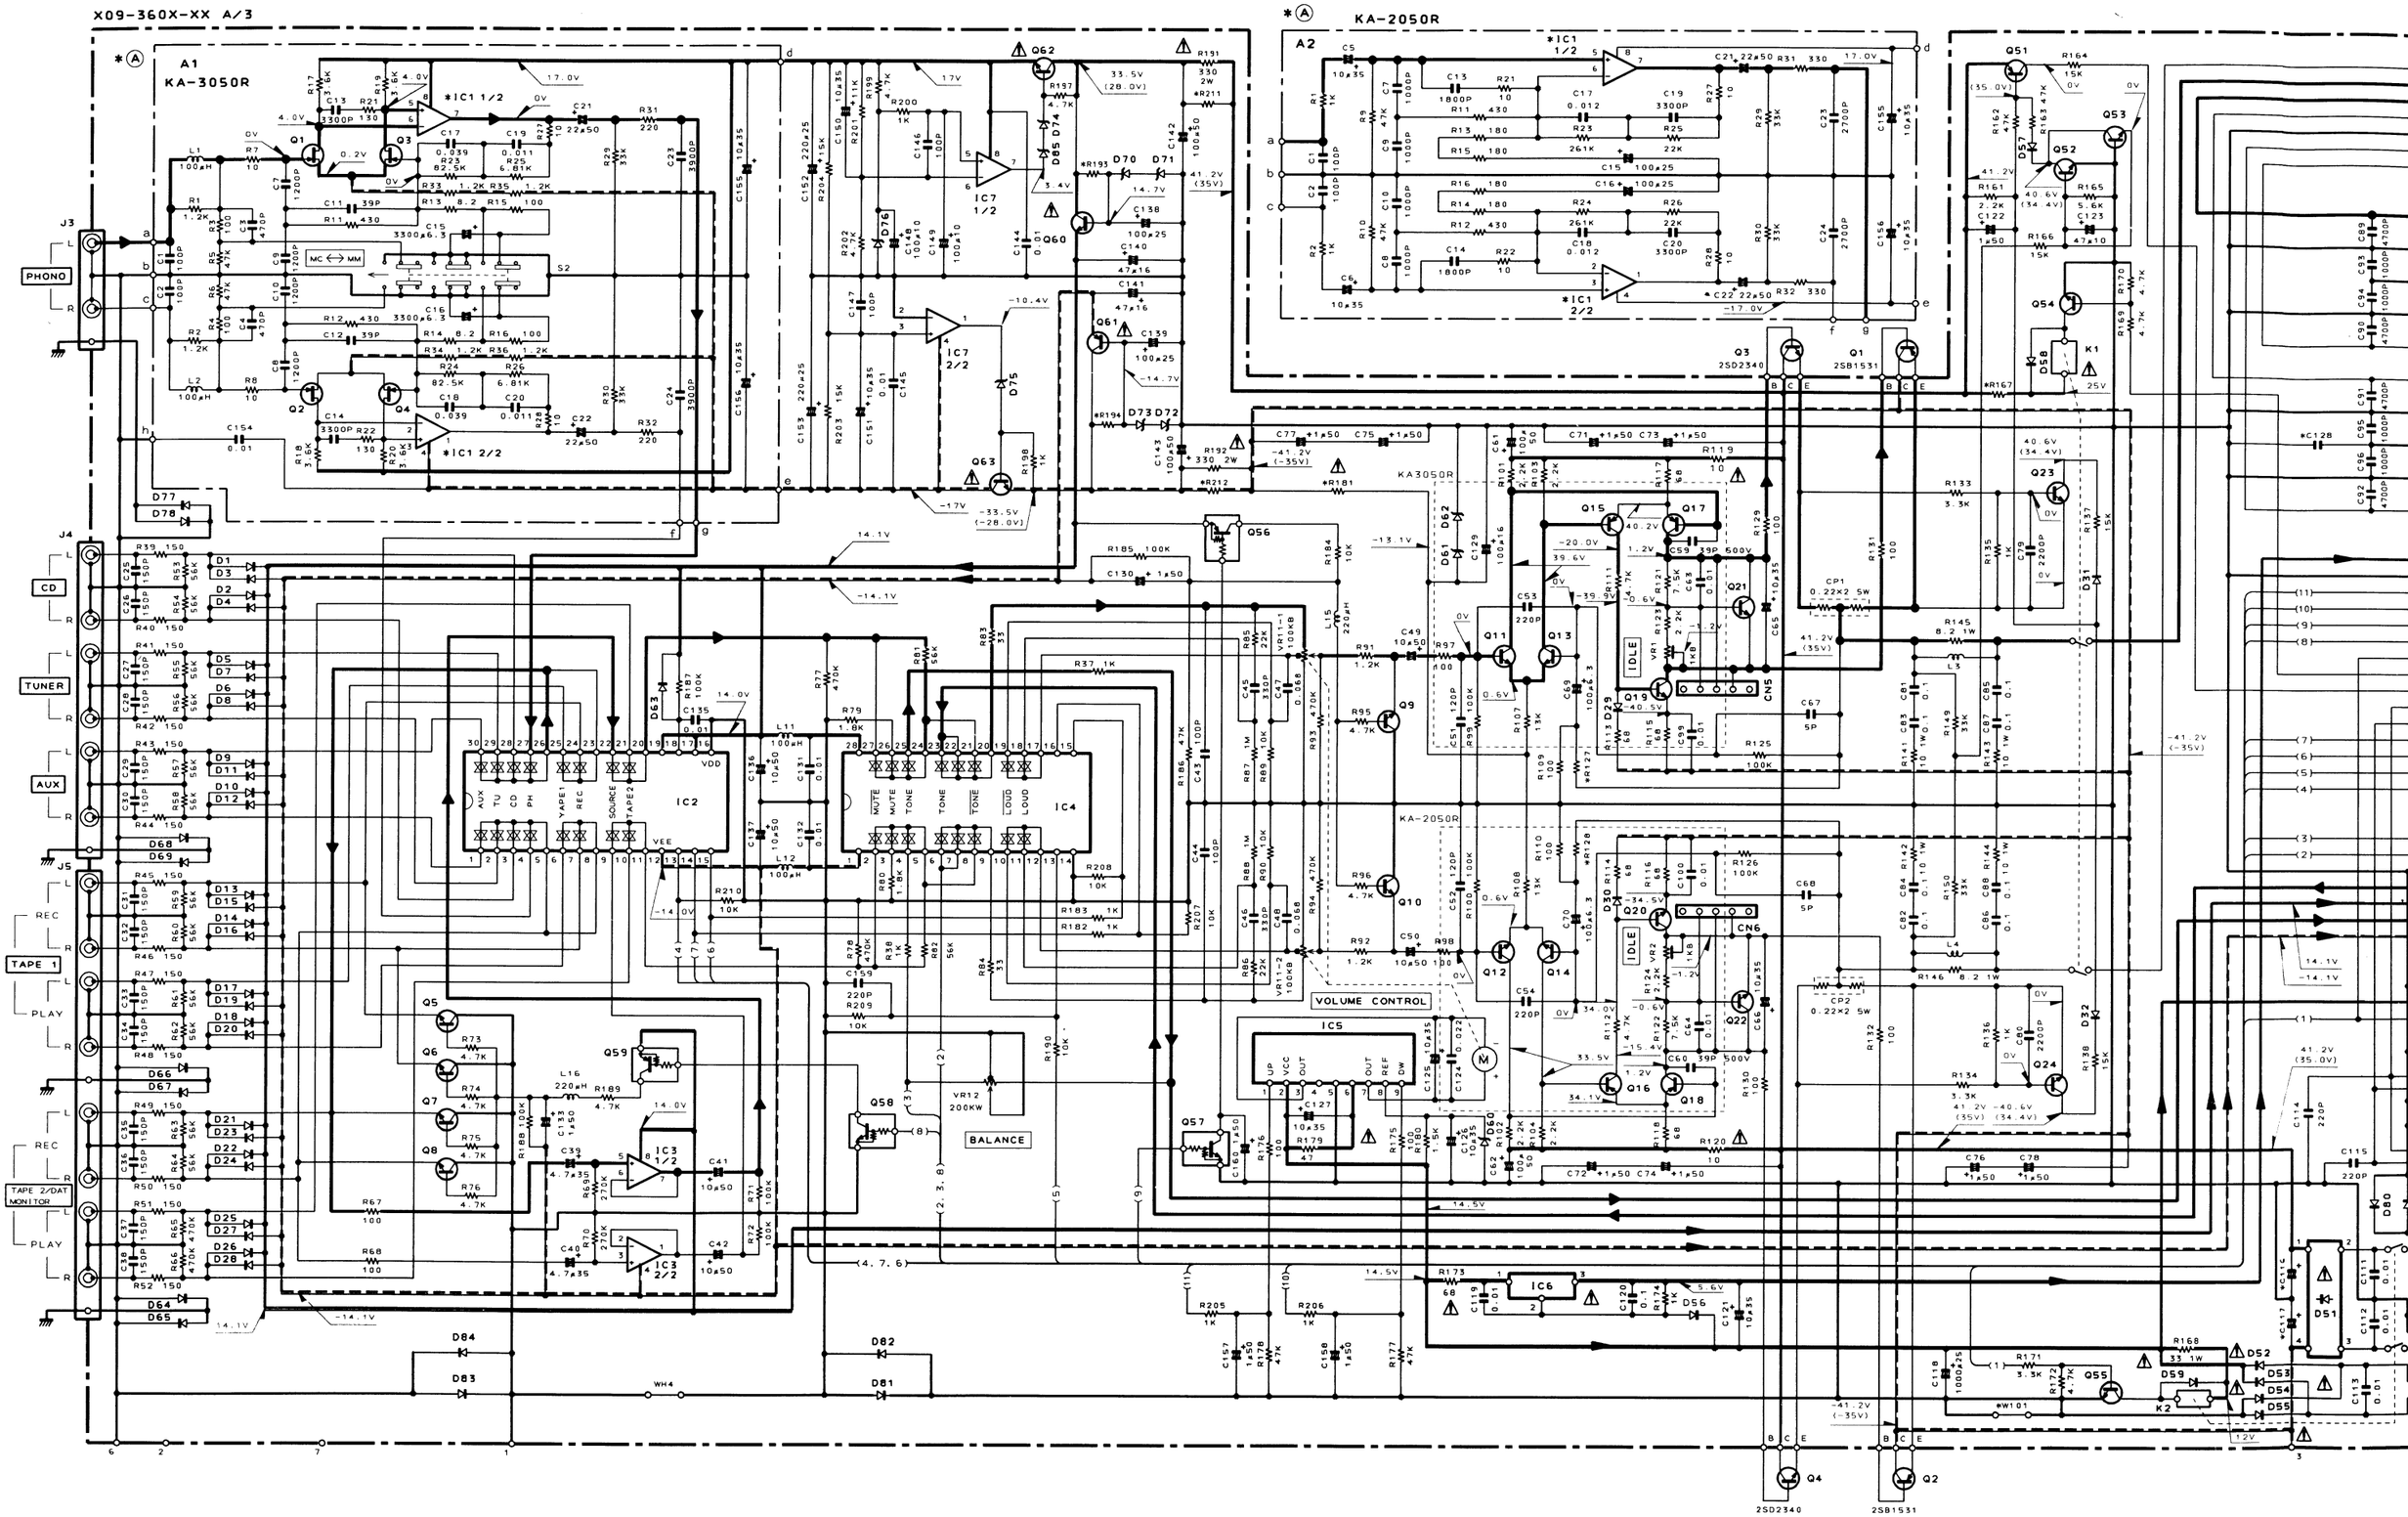
X09-360X-XX A/3
A1
KA-3050R
A2
KA-2050R
*IC1 1/2
*IC1 2/2
IC7 1/2
IC7 2/2
IC2
IC4
IC3 1/2
IC3 2/2
IC5
IC6
Q1
Q2
Q3
Q4
Q5
Q6
Q7
Q8
Q9
Q10
Q11
Q12
Q13
Q14
Q15
Q16
Q17
Q18
Q19
Q20
Q21
Q22
Q23
Q24
Q51
Q52
Q53
Q54
Q55
Q56
Q57
Q58
Q59
Q60
Q61
Q62
Q63
J3
PHONO
J4
CD
TUNER
AUX
J5
TAPE 1
REC
PLAY
TAPE 2/DAT
MONITOR
S2
MC ⟷ MM
BALANCE
VOLUME CONTROL
IDLE
CN5
CN6
K1
K2
WH4
2SD2340
2SB1531

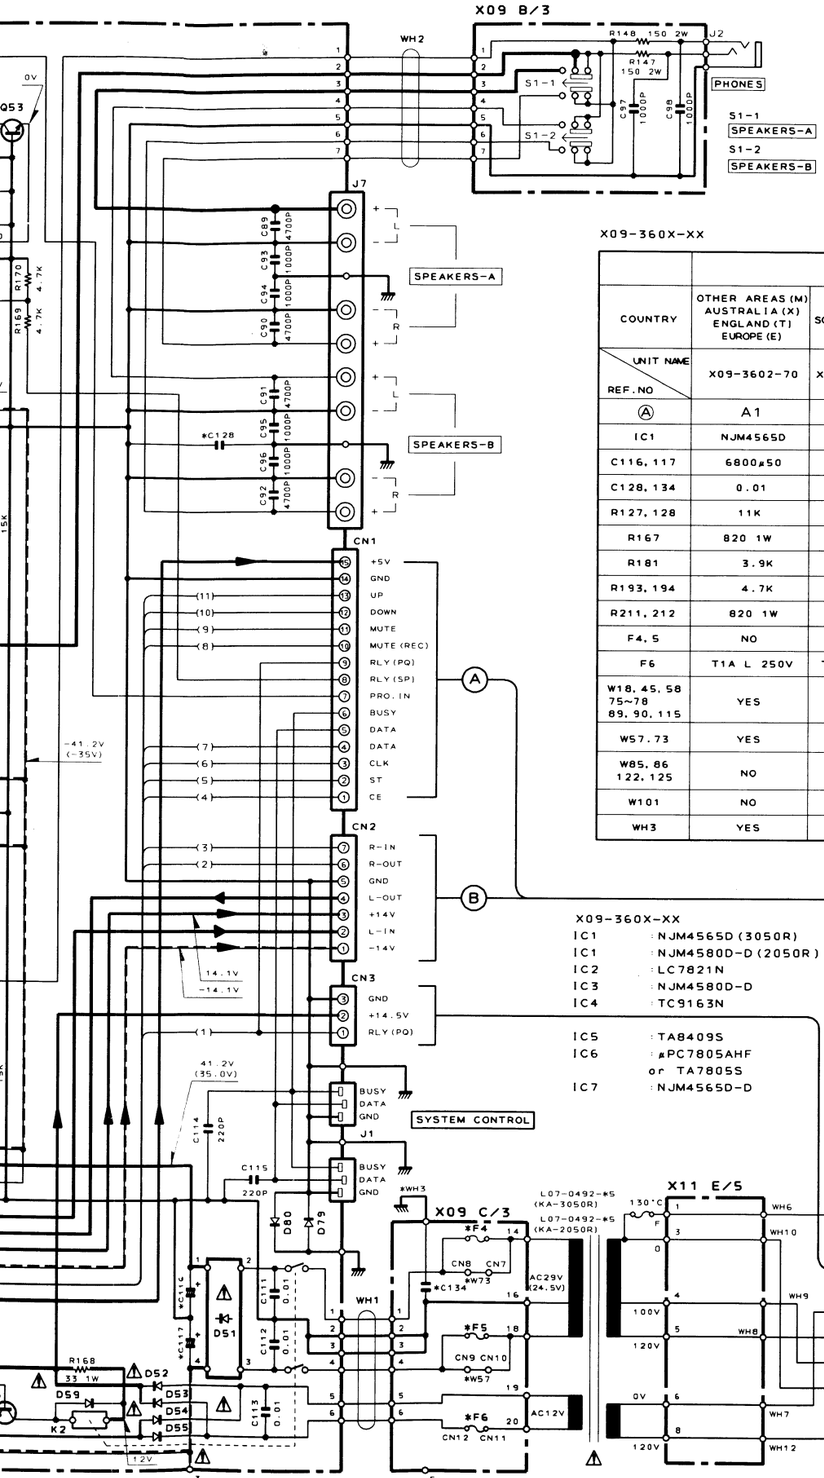

X09-360X-XX

	KA-3050R			KA-2050R		
COUNTRY	OTHER AREAS (M) AUSTRALIA (X) ENGLAND (T) EUROPE (E)	SCANDINAVIA (L)	CANADA (P)	OTHER AREAS (M) AUSTRALIA (X) ENGLAND (T) EUROPE (E)	SCANDINAVIA (L)	CANADA (P)
UNIT NAME / REF. NO	X09-3602-70	X09-3602-71	X09-3601-01	X09-3602-72	X09-3602-73	X09-3601-02
Ⓐ	A1	A1	A1	A2	A2	A2
IC1	NJM4565D	NJM4565D	NJM4565D	NJM4580D-D	NJM4580D-D	NJM4580D-D
C116, 117	6800μ50	6800μ50	6800μ50	5600μ42	5600μ42	5600μ42
C128, 134	0.01	0.01	NO	0.01	0.01	NO
R127, 128	11K	11K	11K	9.1K	9.1K	9.1K
R167	820 1W	820 1W	820 1W	470 1W	470 1W	470 1W
R181	3.9K	3.9K	3.9K	3.3K	3.3K	3.3K
R193, 194	4.7K	4.7K	4.7K	3.9K	3.9K	3.9K
R211, 212	820 1W	820 1W	820 1W	NO	NO	NO
F4, 5	NO	NO	6A 125V	NO	NO	5A 125V
F6	T1A L 250V	T1A L 250V	1A 250V	T1A L 250V	T1A L 250V	1A 250V
W18, 45, 58 75~78 89, 90, 115	YES	YES	YES	NO	NO	NO
W57, 73	YES	YES	NO	YES	YES	NO
W85, 86 122, 125	NO	NO	NO	YES	YES	YES
W101	NO	NO	YES	NO	NO	YES
WH3	YES	YES	NO	YES	YES	NO

X09-360X-XX

IC1	NJM4565D (3050R)
IC1	NJM4580D-D (2050R)
IC2	LC7821N
IC3	NJM4580D-D
IC4	TC9163N
IC5	TA8409S
IC6	μPC7805AHF or TA7805S
IC7	NJM4565D-D

Q1~4	2SK170 (BL, V)
Q5~10	2SC2878 (B)
Q11~14 19, 20	2SC1845 (F, E)
Q15~18	2SA992 (F, E)
Q21, 22	2SC4137 (V, W)
Q23, 24 52, 53	2SC2458 (Y, GR) or 2SC3311A (Q, R)
Q51	2SA1048 (Y, GR) or 2SA1309A (Q, R)
Q54, 55	2SC2003 (L, K)
Q56, 59	UN4112 or DTA124ES
Q57, 58	UN4212 or DTC124ES
Q60, 62, 63	2SD863 (E, F)
Q61	2SB764 (E, F)

D1~30, 56 57, 63~69, 77~84	1SS133 or HSS104
D31, 32 58, 59	1SS131 or HSS104A
D51	RBV-602LFA or D5SBA20F03
D52~55	S5688B
D60, 76	RD5.1JS (B2) or HZS5.1S (B2)
D61, 62 70~74, 85	RD7.5JS (B) or HZS7.5S (B2)
D75	RD20JS (B) or HZS20S (B)

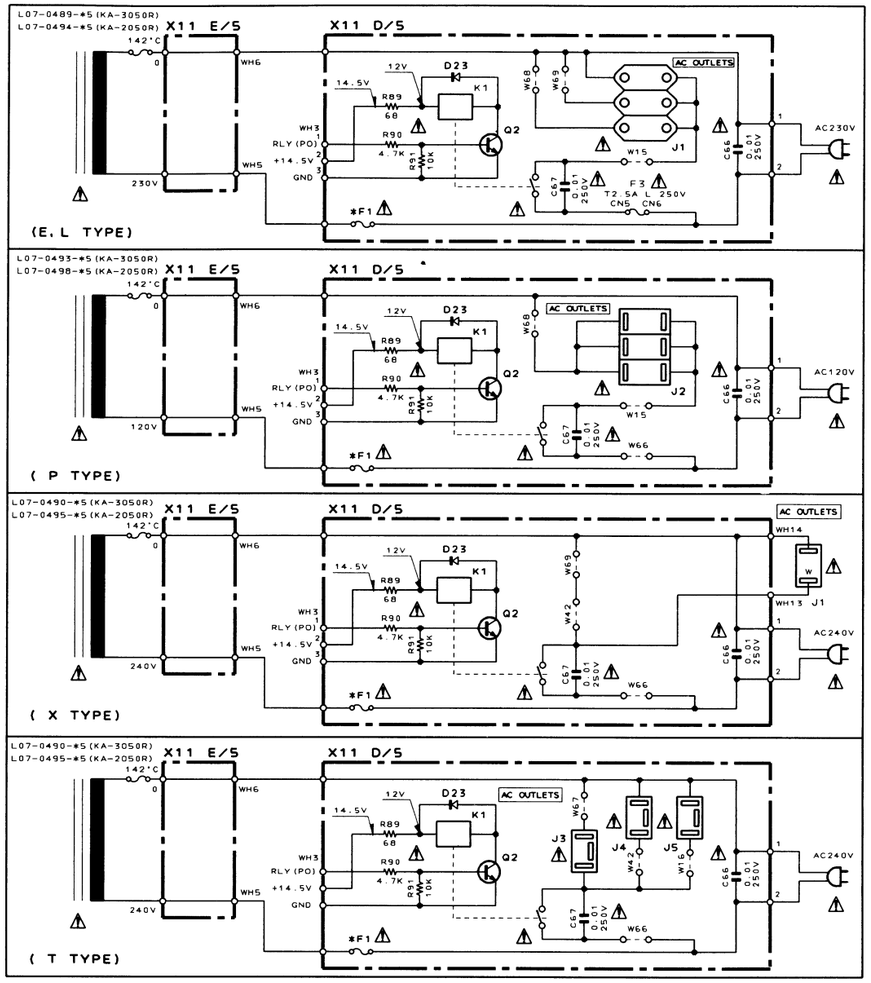

X11-32XX-XX

Q2	2SC2003 (L, K)
D23	1SS133 or HSS104

X11-32XX-XX

COUNTRY	ABB	KA-3050R UNIT NAME / AREF. NO	KA-3050R F1	KA-3050R F2	KA-2050R UNIT NAME / AREF. NO	KA-2050R F1	KA-2050R F2
CANADA	P	X11-3261-01	4A 125V	NO	X11-3271-01	2A 250V	NO
OTHER AREAS	M	X11-3260-21	T1.6A L 250V	T1.6A L 250V	X11-3270-21	T1A L 250V	T1A L 250V
AUSTRALIA	X	X11-3260-71	T1.6A L 250V	NO	X11-3270-71	T1A L 250V	NO
ENGLAND	T	X11-3260-51	T1.6A L 250V	NO	X11-3270-51	T1A L 250V	NO
EUROPE, SCANDINAVIA	E.L	X11-3262-70	T1.6A L 250V	NO	X11-3272-70	T1A L 250V	NO

SIGNAL LINE
GND LINE
+B LINE
−B LINE

Y08-4582-70

KA-2050R/3050R

KENWOOD

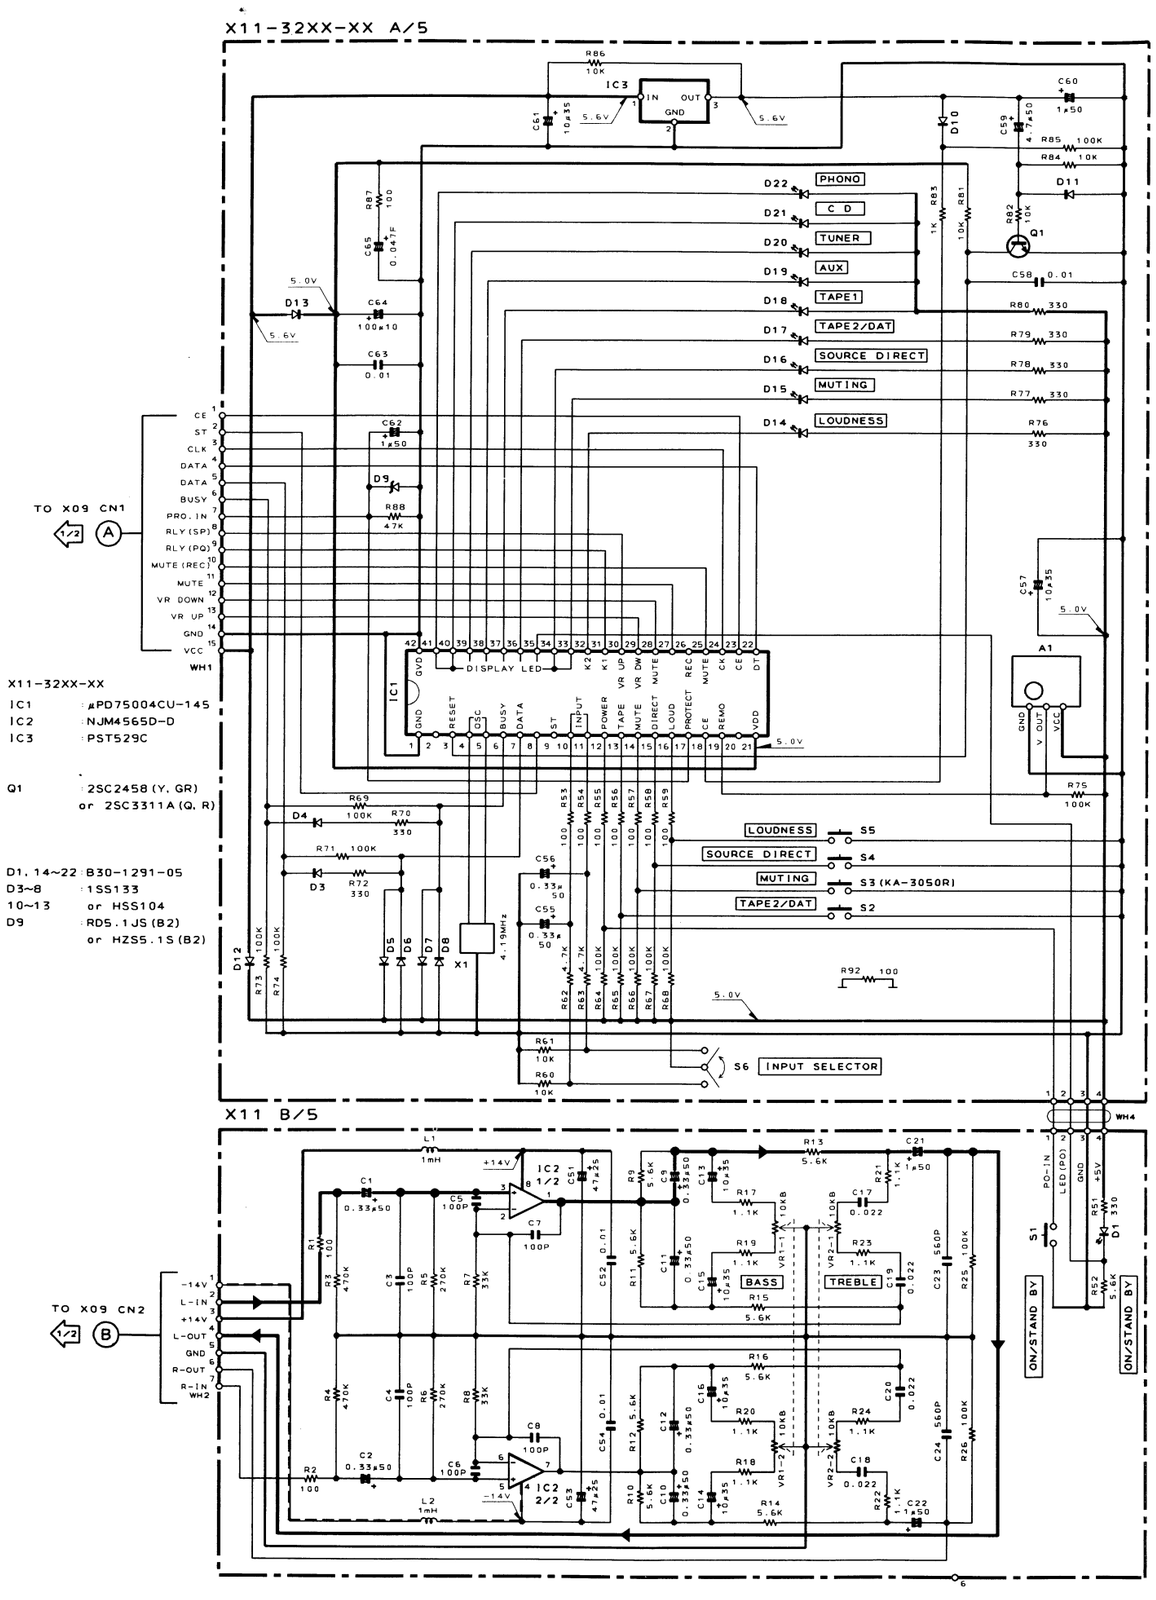

HSS104
HSS104A
HZS5.1S
RD5.1JS
S5688B
1SS131
1SS133



2SA992
2SB764
2SC1845
2SC2003
2SC2878
2SD863



2SB1531BT*5
2SD2340BT*5



DTA124ES
DTC124ES
UN4112
2SA1048
2SC2458



2SC4137

UN4212
2SA1309A
2SC3311A



NJM4565D
NJM4565D-D



TA8409S



NJM4580D-D



UPD75004CU-145



PST529C



2SK170



LC7821N



TC9163N



TA7805S



DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance. Les valeurs peuvent diférer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser gemessen. Dabei schwanken die Meßwerte aufground von Unterschieden zwischen einzelnen Instrumenten order Geräten u. U. geringfügig.

CAUSION: For continued safety, replace safety critical components only with manufacture's recommended parts (refer to parts list). ⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

REMOTE CONTROL OPERATION

Operation keys for KENWOOD components connected by system control cords

Cassette deck operation keys
These keys perform the same operations as the corresponding keys on the cassette deck. However, operations requring simultaneous pressing of two keys are not possible.

CD player operation keys

Input select keys

POWER key

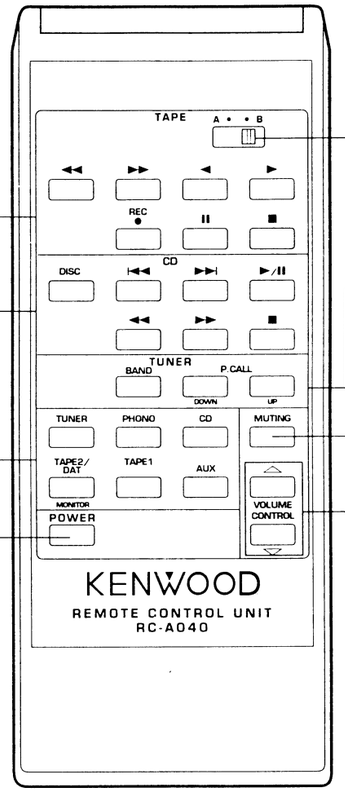

TAPE A/B selector
A: When operating Deck A of a double cassette deck, set this selector to the A position.
B: When operating Deck B of a double cassette deck or single cassette deck, set this selector to the B position.

TUNER operation keys

MUTING key

VOLUME CONTROL up ( ) and down ( ) keys

KA-3050R/KA-2050R operation keys
These keys have the same function as the corresponding keys on the main unit.

KA-2050R/3050R

EXPLODED VIEW

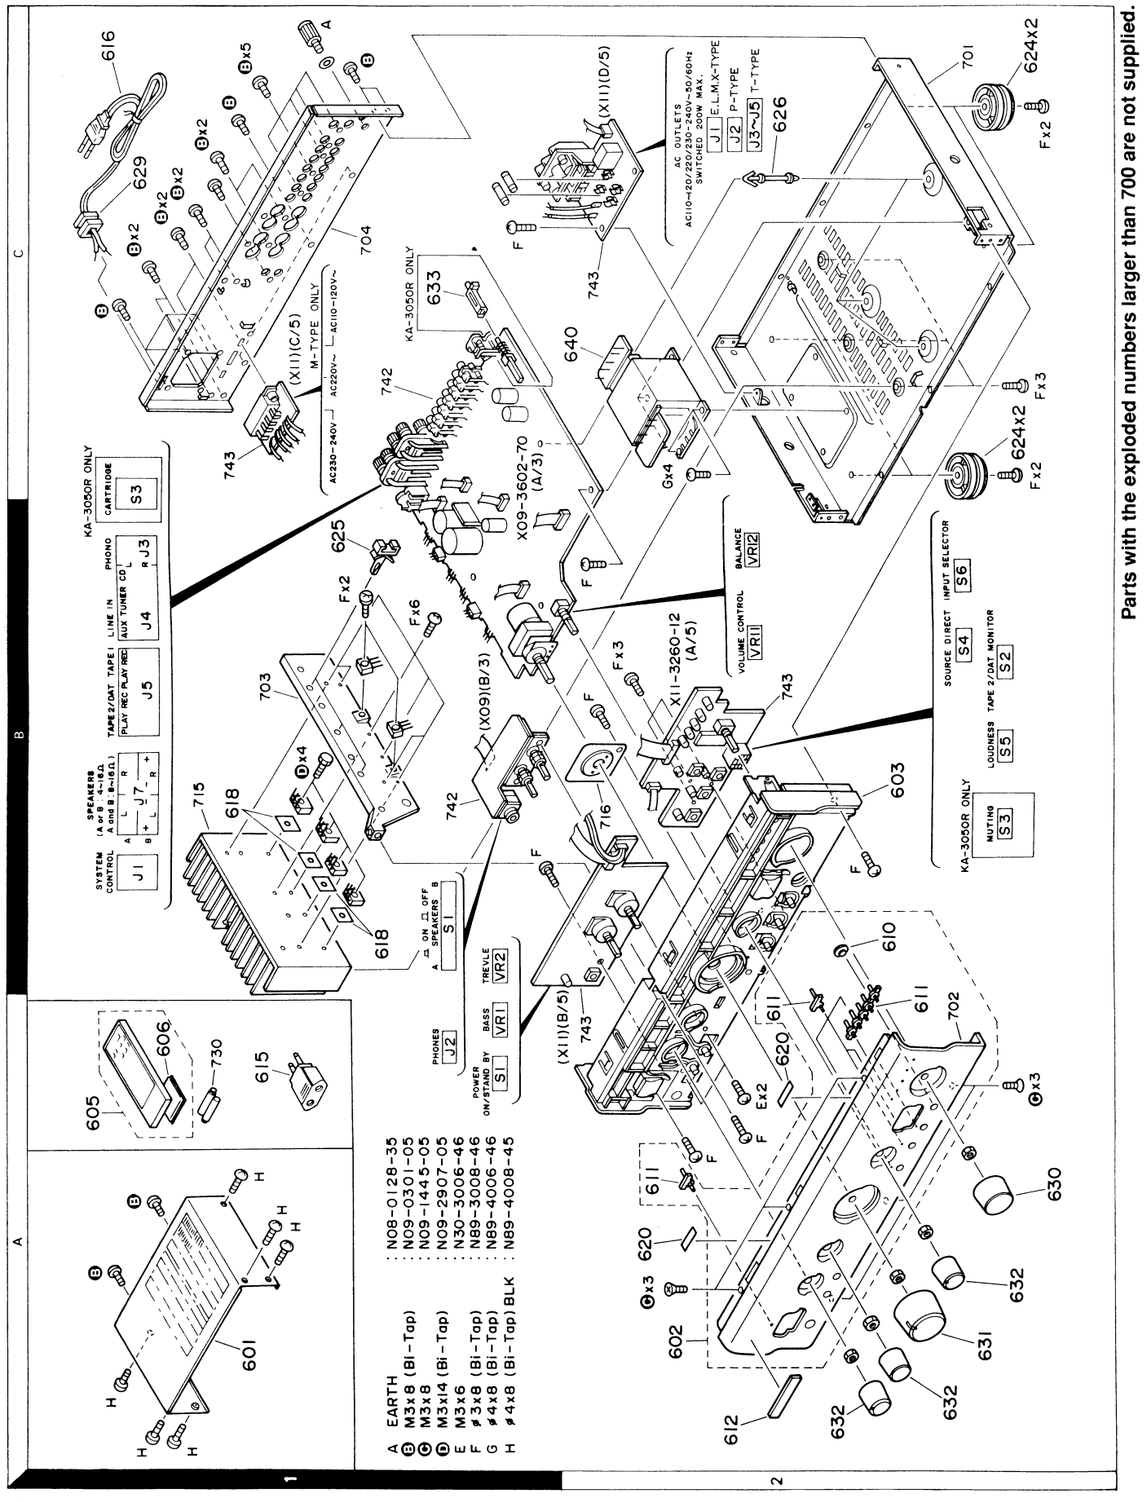

Parts with the exploded numbers larger than 700 are not supplied.

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
KA-2050R						
601	1A	*	A01-2932-02	METALLIC CABINET		
602	2A	*	A60-0219-02	PANEL ASSY		
603	2B	*	A22-1558-01	SUB PANEL		
605	1A	*	A70-0597-05	REMOTE CONTROLLER ASSY		
606	1A		A09-0094-08	BATTERY COVER		
610	2B		B11-0237-14	COLOR FILTER		
611	2A	*	B12-0196-04	INDICATOR		
612	2A		B43-0287-04	KENWOOD BADGE		
-			B46-0096-33	WARRANTY CARD	X	
-			B46-0121-13	WARRANTY CARD	P	
-			B46-0122-23	WARRANTY CARD	EL	
-			B46-0143-13	WARRANTY CARD	T	
-		*	B60-0835-00	INSTRUCTION MANUAL (ENGLISH)		
-		*	B60-0836-00	INSTRUCTION MANUAL (FRENCH)	ELP	
-		*	B60-0837-00	INSTRUCTION MANUAL (GE,DU,IT)	EL	
-		*	B60-0965-00	INSTRUCTION MANUAL (CHINESE)	M	
-		*	B60-0966-00	INSTRUCTION MANUAL (SPANISH)	ELM	
⚠ 615	1A		E03-0115-05	AC PLUG ADAPTER	M	
⚠ 616	1C		E30-0459-05	AC POWER CORD	ELM	
⚠ 616	1C		E30-0974-05	AC POWER CORD	P	
⚠ 616	1C		E30-1341-05	AC POWER CORD	X	
⚠ 616	1C		E30-1416-05	AC POWER CORD	T	
⚠ J1	2C		E03-0114-05	AC OUTLET	X	
620	2A		G11-0153-04	SOFT TAPE (80X12X3)		
		*	H50-0321-04	ITEM CARTON CASE		
-		*	H10-5296-02	POLYSTYRENE FOAMED FIXTURE		
-		*	H10-5297-02	POLYSTYRENE FOAMED FIXTURE		
-			H25-0225-04	PROTECTION BAG (850X450X0.03)	ELXMP	
-			H25-0232-04	PROTECTION BAG (235X350X0.03)	ELXMP	
-			H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-			H25-0654-04	PROTECTION BAG (0225 PRINTED)	T	
624	2C		J02-1034-05	FOOT		
625	1B		J61-0033-05	WIRE BAND		
626	1C		J19-3331-05	UNIT HOLDER		
⚠ 629	1C		J42-0083-05	POWER CORD BUSHING		
-			J61-0307-05	WIRE BAND		
630	2A		K29-4215-04	KNOB INPUT SELECTOR		
631	2A	*	K29-4382-04	KNOB VOLUME CONTROL		
632	2A	*	K29-4384-04	KNOB BASS,TREBLE,BALANCE		
⚠ 640	2C	*	L07-0494-05	POWER TRANSFORMER	EL	
⚠ 640	2C	*	L07-0495-05	POWER TRANSFORMER	TX	
⚠ 640	2C	*	L07-0497-05	POWER TRANSFORMER	M	
⚠ 640	2C	*	L07-0498-05	POWER TRANSFORMER	P	
A	1C		N08-0128-35	BINDING POST (EARTH)		
B	1A,1C		N09-0301-05	TAPTITE SCREW (3X8)		
C	2A		N09-1445-05	SET SCREW (M3X8)		
D	1B	*	N09-2907-05	SEMS (TAPTITE SCREW)(3X14)		
E	2A		N30-3006-46	PAN HEAD MACHINE SCREW		
F	1A,1B		N89-3008-46	BINDING HEAD TAPTITE SCREW		
G	2C		N89-4006-46	BINDING HEAD TAPTITE SCREW		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

AUDIO UNIT

X09-3601-01	KA-3050R P
X09-3601-02	KA-2050R P
X09-3602-70	KA-3050R M, X, T, E
X09-3602-71	KA-3050R L
X09-3602-72	KA-2050R M, X, T, E
X09-3602-73	KA-2050R L

CONTROL UNIT

X11-3260-21	KA-3050R M
X11-3260-51	KA-3050R T
X11-3260-71	KA-3050R X
X11-3261-01	KA-3050R P
X11-3262-70	KA-3050R E, L
X11-3270-21	KA-2050R M
X11-3270-51	KA-2050R T
X11-3270-71	KA-2050R X
X11-3271-01	KA-2050R P
X11-3272-70	KA-2050R E, L

PARTS LIST

KA-2050R/3050R

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No. 2

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
H	1A		N89-4008-45	BINDING HEAD TAPTITE SCREW		
Q1 ,2		*	2SB1531BT*5	TRANSISTOR		
Q3 ,4		*	2SD2340BT*5	TRANSISTOR		
KA-3050R						
601	1A	*	A01-2932-02	METALLIC CABINET		
602	2A	*	A60-0217-02	PANEL ASSY		
603	2B	*	A22-1558-01	SUB PANEL		
605	1A	*	A70-0597-05	REMOTE CONTROLLER ASSY		
606	1A		A09-0094-08	BATTERY COVER		
610	2B		B11-0237-14	COLOR FILTER		
611	2A	*	B12-0196-04	INDICATOR		
612	2A		B43-0287-04	KENWOOD BADGE		
-			B46-0096-33	WARRANTY CARD	X	
-			B46-0121-13	WARRANTY CARD	P	
-			B46-0122-23	WARRANTY CARD	EL	
-			B46-0143-13	WARRANTY CARD	T	
-		*	B60-0835-00	INSTRUCTION MANUAL (ENGLISH)		
-		*	B60-0836-00	INSTRUCTION MANUAL (FRENCH)	ELP	
-		*	B60-0837-00	INSTRUCTION MANUAL (GE,DU,IT)	EL	
-		*	B60-0965-00	INSTRUCTION MANUAL (CHINESE)	M	
-		*	B60-0966-00	INSTRUCTION MANUAL (SPANISH)	ELM	
⚠ 615	1A		E03-0115-05	AC PLUG ADAPTER	M	
⚠ 616	1C		E30-0459-05	AC POWER CORD	ELM	
⚠ 616	1C		E30-0974-05	AC POWER CORD	P	
⚠ 616	1C		E30-1341-05	AC POWER CORD	X	
⚠ 616	1C		E30-1416-05	AC POWER CORD	T	
J1	2C		E03-0114-05	AC OUTLET	X	
618	1B		F20-1322-05	INSULATING BOARD		
620	2A		G11-0153-04	SOFT TAPE (80X12X3)		
		*	H50-0320-04	ITEM CARTON CASE		
-		*	H10-5296-02	POLYSTYRENE FOAMED FIXTURE		
-		*	H10-5297-02	POLYSTYRENE FOAMED FIXTURE		
-			H25-0225-04	PROTECTION BAG (850X450X0.03)	ELXMP	
-			H25-0232-04	PROTECTION BAG (235X350X0.03)	ELXMP	
-			H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-			H25-0654-04	PROTECTION BAG (0225 PRINTED)	T	
624	2C		J02-1034-05	FOOT		
625	1B		J61-0033-05	WIRE BAND		
626	1C		J19-3331-05	UNIT HOLDER		
⚠ 629	1C		J42-0083-05	POWER CORD BUSHING		
-			J61-0307-05	WIRE BAND		
630	2A		K29-4215-04	KNOB INPIUT SELECTOR		
631	2A	*	K29-4382-04	KNOB VOLUME CONTROL		
632	2A	*	K29-4384-04	KNOB BASS,TREBLE,BALANCE		
633	1C	*	K29-4385-04	KNOB MM/MC		
⚠ 640	2C	*	L07-0489-05	POWER TRANSFORMER	EL	
⚠ 640	2C	*	L07-0490-05	POWER TRANSFORMER	TX	
⚠ 640	2C	*	L07-0492-05	POWER TRANSFORMER	M	
⚠ 640	2C	*	L07-0493-05	POWER TRANSFORMER	P	
A	1C		N08-0128-35	BINDING POST (EARTH)		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No. 3

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
B	1A,1C		N09-0301-05	TAPTITE SCREW (3X8)		
C	2A		N09-1445-05	SET SCREW (M3X8)		
D	1B	*	N09-2907-05	SEMS (TAPTITE SCREW)(3X14)		
E	2A		N30-3006-46	PAN HEAD MACHINE SCREW		
F	1A,1B		N89-3008-46	BINDING HEAD TAPTITE SCREW		
G	2C		N89-4006-46	BINDING HEAD TAPTITE SCREW		
H	1A		N89-4008-45	BINDING HEAD TAPTITE SCREW		
Q1 ,2		*	2SB1531BT*5	TRANSISTOR		
Q3 ,4		*	2SD2340BT*5	TRANSISTOR		
AUDIO UNIT (X09-360X-XX)						
C1 ,2			CF92FV1H101K	MF 100PF K		
C3 ,4			CF92FV1H471J	MF 470PF J		3
C5 ,6			CE04KW1V100M	ELECTRO 10UF 35WV		2
C7 -10			CF92FV1H102J	MF 1000PF J		2
C7 -10			CF92FV1H122J	MF 1200PF J		3
C11 ,12			CC45FSL1H390J	CERAMIC 39PF J		3
C13 ,14			CF92FV1H182J	MF 1800PF J		2
C13 ,14			CF92FV1H332J	MF 3300PF J		3
C15 ,16			CE04KW1E101M	ELECTRO 100UF 25WV		2
C15 ,16			C90-1951-05	ELECTRO 3300UF 6.3WV		3
C17 ,18			CF92FV1H123J	MF 0.012UF J		2
C17 ,18			CF92FV1H393J	MF 0.039UF J		3
C19 ,20			CF92FV1H113J	MF 0.011UF J		3
C19 ,20			CF92FV1H332J	MF 3300PF J		2
C21 ,22			CE04KW1H220M	ELECTRO 22UF 50WV		
C23 ,24			CF92FV1H272J	MF 2700PF J		2
C23 ,24			CF92FV1H392J	MF 3900PF J		3
C25 -38			CF92FV1H151K	MF 150PF K		
C39 ,40			CE04KW1V4R7M	ELECTRO 4.7UF 35WV		
C41 ,42		*	C90-1971-05	ELECTRO 10UF 50WV		
C43 ,44			CF92FV1H101K	MF 100PF K		
C45 ,46			CF92FV1H331K	MF 330PF K		
C47 ,48			CF92FV1H683J	MF 0.068UF J		
C49 ,50		*	C90-1971-05	ELECTRO 10UF 50WV		
C51 ,52			CF92FV1H121K	MF 120PF K		
C53 ,54			CF92FV1H221K	MF 220PF K		
C59 ,60			CC45FSL2H390J	CERAMIC 39PF J		
C61 ,62			CE04KW1H101M	ELECTRO 100UF 50WV		
C63 ,64			CF92FV1H103J	MF 0.010UF J		
C65 ,66			CE04KW1V100M	ELECTRO 10UF 35WV		
C67 ,68			CC45FSL1H050C	CERAMIC 5.0PF C		
C69 ,70		*	C90-1972-05	ELECTRO 100UF 6.3WV		
C71 -78			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C79 ,80			CK45FB1H222K	CERAMIC 2200PF K		
C81 -88			CF92FV1H104J	MF 0.10UF J		
C89 -92			CF92FV1H472J	MF 4700PF J		
C93 -98			CK45FB1H102K	CERAMIC 1000PF K		
C99 ,100			CF92FV1H103J	MF 0.010UF J		
C111-113			CK45FF1H103Z	CERAMIC 0.010UF Z		
C114,115			CC45FSL1H221J	CERAMIC 220PF J		
C116,117		*	C90-1963-15	ELECTRO 5600UF 42WV		2
C116,117		*	C90-1968-15	ELECTRO 6800UF 50WV		3
C118			CE04KW1E102M	ELECTRO 1000UF 25WV		
C119			CK45FF1H103Z	CERAMIC 0.010UF Z		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No. 4

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C120			CF92FV1H104J	MF 0.10UF J		
C121			CE04KW1V100M	ELECTRO 10UF 35WV		
C122			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C123			CE04KW1A470M	ELECTRO 47UF 10WV		
C124			CK45FF1H223Z	CERAMIC 0.022UF Z		
C125-127			CE04KW1V100M	ELECTRO 10UF 35WV		
C128			CK45FF1H103Z	CERAMIC 0.010UF Z	ELTXM	
C129			C90-1917-05	ELECTRO 100UF 16WV		
C130			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C131,132			CF92FV1H103J	MF 0.010UF J		
C133			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C134			CK45FF1H103Z	CERAMIC 0.010UF Z	ELTXM	
C135			CF92FV1H103J	MF 0.010UF J		
C136,137		*	C90-1971-05	ELECTRO 10UF 50WV		
C138,139			CE04KW1E101M	ELECTRO 100UF 25WV		
C140,141			CE04KW1C470M	ELECTRO 47UF 16WV		
C142,143			CE04KW1H101M	ELECTRO 100UF 50WV		
C144,145			CF92FV1H103J	MF 0.010UF J		
C146,147			CC45FSL1H101J	CERAMIC 100PF J		
C148,149			CE04KW1A101M	ELECTRO 100UF 10WV		
C150,151			CE04KW1V100M	ELECTRO 10UF 35WV		
C152,153			CE04KW1E221M	ELECTRO 220UF 25WV		
C154			CK45FF1H103Z	CERAMIC 0.010UF Z	ELTXM	3
C155,156			CE04KW1V100M	ELECTRO 10UF 35WV		
C157,158			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C159			CC45FSL1H221J	CERAMIC 220PF J		
C160			CE04KW1H010M	ELECTRO 1.0UF 50WV		
J1			E11-0188-05	MINIATURE PHONE JACK SYNCRO		
J2			E11-0208-05	PHONE JACK PHONES		
J3			E13-0235-05	PHONO JACK PHONO		
J4			E13-0634-05	PHONO JACK CD/TUNER/AUX		
J5			E13-0820-05	PHONO JACK TAPE/DAT MONITOR		
J7		*	E70-0018-05	SCREW TERMINAL BOARD SPEAKRES	ETXMP	
J7		*	E70-0019-05	SCREW TERMINAL BOARD SPEAKERS	L	
⚠ F4 ,5			F04-5022-05	FUSE (UL) (125V 5A UL)	P 2	
⚠ F4 ,5			F05-6029-05	FUSE (UL) (125V 6A)	P 3	
⚠ F6			F04-1026-05	FUSE (UL) (250V 1A)	P	
⚠ F6			F06-1022-05	FUSE (SEMKO) (250V T1A)	ELTXM	
-			J11-0098-05	WIRE CLAMPER		
CN7 -12			J13-0075-05	FUSE CLIP	P	
CN11,12			J13-0075-05	FUSE CLIP	ELTXM	
L1 ,2			L40-1011-47	SMALL FIXED INDUCTOR(100UH,K)		3
L3 ,4			L39-0085-05	PHASE COMPENSATION COIL		
L11 ,12			L40-1011-17	SMALL FIXED INDUCTOR(100UH,K)		
L15 ,16			L40-2211-17	SMALL FIXED INDUCTOR(220UH,K)		
CP1 ,2			R90-0187-05	MULTI-COMP 0.22X2 K 5W		
R23 ,24			RN14BK2C2613FTS	RN 261K F 1/6W		2
R23 ,24			RN14BK2C8252FTS	RN 82.5K F 1/6W		3
R25 ,26			RN14BK2C6811FTS	RN 6.81K F 1/6W		3
R111,112			RD14AB2E472JTS	FL-PROOF RD 4.7K J 1/4W		
R113-118			RD14AB2E680JTS	FL-PROOF RD 68 J 1/4W		
R119,120			RD14AB2E100JTS	FL-PROOF RD 10 J 1/4W		
R129-132			RD14AB2E101JTS	FL-PROOF RD 100 J 1/4W		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No. 5

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R133,134			RD14AB2E332JTS	FL-PROOF RD 3.3K J 1/4W		
R135,136			RD14AB2E102JTS	FL-PROOF RD 1.0K J 1/4W		
R141-144			RS14GB3A100JKW	FL-PROOF RS 10 J 1W		
R145,146		*	RS14GB3A0R2JKW	FL-PROOF RS 8.2 J 1W		
R147,148			RS14DB3D151JTE	FL-PROOF RS 150 J 2W		
R167			RS14DB3A471JTE	FL-PROOF RS 470 J 1W		2
R167			RS14DB3A821JTE	FL-PROOF RS 820 J 1W		3
R168			RS14DB3A330JTE	FL-PROOF RS 33 J 1W		
R173			RD14AB2E680JTS	FL-PROOF RD 68 J 1/4W		
R179			RD14AB2E470JTS	FL-PROOF RD 47 J 1/4W		
R181			RD14AB2E332JTS	FL-PROOF RD 3.3K J 1/4W		2
R181			RD14AB2E392JTS	FL-PROOF RD 3.9K J 1/4W		3
R191,192		*	RS14GB3D331JKW	FL-PROOF RS 330 J 2W		
R193,194			RD14AB2E392JTS	FL-PROOF RD 3.9K J 1/4W		2
R193,194			RD14AB2E472JTS	FL-PROOF RD 4.7K J 1/4W		3
R197			RD14AB2E472JTS	FL-PROOF RD 4.7K J 1/4W		
R211,212			RS14DB3A821JTE	FL-PROOF RS 820 J 1W		3
VR1 ,2			R12-1616-05	TRIMMING POT.(1K) IDLEING		
VR11		*	R29-5068-05	POTENTIOMETER(100K) VOLUME		
VR12			R05-5037-05	POTENTIOMETER(200K) BALANCE		
K1			S76-0005-05	MAGNETIC RELAY		
K2			S76-0015-05	MAGNETIC RELAY		
S1		*	S68-0010-05	PUSH SWITCH SPEAKERS A/B		
S2			S40-6035-05	PUSH SWITCH MM/MC		3
D1 -30			HSS104	DIODE		
D1 -30			1SS133	DIODE		
D31 ,32			HSS104A	DIODE		
D31 ,32			1SS131	DIODE		
D51			D5SBA20F03	DIODE		
D51			RBV-602LFA	DIODE		
D52 -55			S5688B	DIODE		
D56 ,57			HSS104	DIODE		
D56 ,57			1SS133	DIODE		
D58 ,59			HSS104A	DIODE		
D58 ,59			1SS131	DIODE		
D60			HZS5.1S(B2)	ZENER DIODE		
D60			RD5.1JS(B2)	ZENER DIODE		
D61 ,62			HZS7.5S(B)	ZENER DIODE		
D61 ,62			RD7.5JS(B)	ZENER DIODE		
D63 -69			HSS104	DIODE		
D63 -69			1SS133	DIODE		
D70 -74			HZS7.5S(B)	ZENER DIODE		
D70 -74			RD7.5JS(B)	ZENER DIODE		
D75			HZS20S(B)	ZENER DIODE		
D75			RD20JS(B)	ZENER DIODE		
D76			HZS5.1S(B2)	ZENER DIODE		
D76			RD5.1JS(B2)	ZENER DIODE		
D77 -84			HSS104	DIODE		
D77 -84			1SS133	DIODE		
D85			HZS7.5S(B)	ZENER DIODE		
D85			RD7.5JS(B)	ZENER DIODE		
IC1			NJM4565D	IC(OP AMP X2)		3
IC1			NJM4580D-D	IC(OP AMP X2)		2
IC2			LC7821N	IC(FUNCTION CONTROL SWITCH)		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No. 6

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
IC3			NJM4580D-D	IC(OP AMP X2)		
IC4			TC9163N	IC(BILATERAL SWITCH X16)		
IC5			TA8409S	IC(MOTOR CONTROL)		
IC6			TA7805S	IC(VOLTAGE REGULATOR/ +5V)		
IC6			UPC7805AHF	IC(VOLTAGE REGULATOR/ +5V)		
IC7			NJM4565D-D	IC(OP AMP X2)		
Q1 -4			2SK170(BL)	FET		3
Q1 -4			2SK170(V)	FET		3
Q5 -10			2SC2878(B)	TRANSISTOR		
Q11 -14			2SC1845(F,E)	TRANSISTOR		
Q15 -18			2SA992(F,E)	TRANSISTOR		
Q19 ,20			2SC1845(F,E)	TRANSISTOR		
Q21 ,22			2SC4137(V,W)	TRANSISTOR		
Q23 ,24			2SC2458(Y,GR)	TRANSISTOR		
Q23 ,24			2SC3311A(Q,R)	TRANSISTOR		
Q51			2SA1048(Y,GR)	TRANSISTOR		
Q51			2SA1309A(Q,R)	TRANSISTOR		
Q52 ,53			2SC2458(Y,GR)	TRANSISTOR		
Q52 ,53			2SC3311A(Q,R)	TRANSISTOR		
Q54 ,55			2SC2003(L,K)	TRANSISTOR		
Q56			DTA124ES	DIGITAL TRANSISTOR		
Q56			UN4112	DIGITAL TRANSISTOR		
Q57 ,58			DTC124ES	DIGITAL TRANSISTOR		
Q57 ,58			UN4212	DIGITAL TRANSISTOR		
Q59			DTA124ES	DIGITAL TRANSISTOR		
Q59			UN4112	DIGITAL TRANSISTOR		
Q60			2SD863(E,F)	TRANSISTOR		
Q61			2SB764(E,F)	TRANSISTOR		
Q62 ,63			2SD863(E,F)	TRANSISTOR		
CONTROL UNIT (X11-32XX-XX)						
D1			B30-1291-05	LED(LN21CPSLX(V)-(TA4))		
D14 -22			B30-1291-05	LED(LN21CPSLX(V)-(TA4))		
C1 ,2			CE04KW1HR33M	ELECTRO 0.33UF 50WV		
C3 -8			CF92FV1H101K	MF 100PF K		
C9 -12		*	C90-1969-05	ELECTRO 0.33UF 50WV		
C13 -16		*	C90-1970-05	ELECTRO 10UF 35WV		
C17 -20			CF92FV1H223J	MF 0.022UF J		
C21 ,22			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C23 ,24			CF92FV1H561J	MF 560PF J		
C51			CE04KW1E470M	ELECTRO 47UF 25WV		
C52			CF92FV1H103J	MF 0.010UF J		
C53			CE04KW1E470M	ELECTRO 47UF 25WV		
C54			CF92FV1H103J	MF 0.010UF J		
C55 ,56			CE04KW1HR33M	ELECTRO 0.33UF 50WV		
C57			C90-3244-05	ELECTRO 10UF 35WV		
C58			CK45FF1H103Z	CERAMIC 0.010UF Z		
C59			C90-3256-05	ELECTRO 4.7UF 50WV		
C60			C90-3253-05	ELECTRO 1UF 50WV		
C61			C90-3244-05	ELECTRO 10UF 35WV		
C62			CE04KW1H010M	ELECTRO 1.0UF 50WV		
C63			CK45FF1H103Z	CERAMIC 0.010UF Z		
C64			CE04KW1A101M	ELECTRO 100UF 10WV		
C65			C90-1827-05	BACKUP 0.047F 5.5WV		
⚠ C66 ,67			C91-1439-05	FILM 0.01UF 250VAC		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

No. 7

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
⚠ J1		*	E03-0131-05	AC OUTLET	ELM	
⚠ J2			E03-0111-05	AC OUTLET	P	
⚠ J3 -5			E03-0109-05	AC OUTLET	T	
⚠ F1			F04-2025-05	FUSE (UL) (250V 2A)	P	2
⚠ F1			F05-1623-05	FUSE (SEMKO) (250V T1.6A)	ELTX	3
⚠ F1			F05-4028-05	FUSE (UL) (125V 4A)	P	3
⚠ F1			F06-1022-05	FUSE (SEMKO) (250V T1A)	ELTX	2
⚠ F1 ,2			F05-1623-05	FUSE (SEMKO) (250V T1.6A)	M	3
⚠ F1 ,2			F06-1022-05	FUSE (SEMKO) (250V T1A)	M	2
⚠ F3			F05-2525-05	FUSE (SEMKO) (250V T2.5A)	EL	
CN1 -4			J13-0075-05	FUSE CLIP	M	
CN1 ,2			J13-0075-05	FUSE CLIP	ELTXP	
CN5 ,6			J13-0075-05	FUSE CLIP	EL	
L1 ,2			L40-1021-14	SMALL FIXED INDUCTOR(1.0MH,K)		
X1			L78-0209-05	RESONATOR 4.194MHZ		
R89			RD14AB2E680JTS	FL-PROOF RD 68 J 1/4W		
VR1 ,2			R06-3061-05	POTENTIOMETER BASS,TRESLE		
K1			S76-0009-05	MAGNETIC RELAY		
S1 -5			S40-1064-05	PUSH SWITCH KEY BOARD		3
S1 ,2			S40-1064-05	PUSH SWITCH POWER,TAPE2/DAT		2
S4 ,5			S40-1064-05	PUSH SWITCH SOURCE DIR,LOUDNES		2
⚠ S7			S31-2322-05	SLIDE SWITCH VOLTAGE SELECTOR	M	
S6		*	T99-0526-05	ROTARY ENCODER INPUT SELECTOR		
D3 -8			HSS104	DIODE		
D3 -8			1SS133	DIODE		
D9			HZS5.1S(B2)	ZENER DIODE		
D9			RD5.1JS(B2)	ZENER DIODE		
D10 -13			HSS104	DIODE		
D10 -13			1SS133	DIODE		
D23			HSS104	DIODE		
D23			1SS133	DIODE		
IC1		*	UPD75004CU-145	IC(MICROPROCESSOR)		
IC2			NJM4565D-D	IC(OP AMP X2)		
IC3			PST529C	IC(SYSTEM RESET)		
Q1			2SC2458(Y,GR)	TRANSISTOR		
Q1			2SC3311A(Q,R)	TRANSISTOR		
Q2			2SC2003(L,K)	TRANSISTOR		
A1			W02-1046-05	ELECTRIC CIRCUIT MODULE		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

3 : KA-3050R
2 : KA-2050R

⚠ indicates safety critical components.

SPECIFICATIONS (For U.K. and Europe)

KA-3050R

Continuous rated power output
(DIN) 1 kHz, at 8 Ω ..... 55 W + 55 W
at 4 Ω ..... 70 W + 70 W
(IEC/NF) From 63 Hz to 12,500 Hz, 0.7% T.H.D.
at 8 Ω ..... 55 W + 55 W
at 4 Ω ..... 70 W + 70 W
Dynamic power ..... 65 W (8 Ω)
70 W (6 Ω)
85 W (4 Ω)
100 W (2 Ω)
Damping factor ..... 40 (50 Hz)
Total harmonic distortion 0.05%
(20 Hz ~ 20,000 Hz, 45 W, 8 Ω)
0.02% (1 kHz, 45 W, 8 Ω)
Intermodulation distortion ..... 0.05% (45 W, 8 Ω)
(70 Hz : 7 kHz = 4:1)
Frequency response
CD ..... 5 Hz ~ 90 kHz, +0 dB, –3 dB
PHONO 'RIAA' response ..... 20 Hz ~ 20 kHz,
+0.3 dB, –0.3 dB
Maximum input level
PHONO (MM) ..... 130 mV, 0.5% T.H.D. at 1 kHz
PHONO (MC) ..... 10 mV, 0.5% T.H.D. at 1 kHz
Signal to noise ratio
PHONO (MM) ..... 87 dB (IHF '66)
82 dB (IHF '78)
PHONO (MC) ..... 67 dB (IHF '66)
75 dB (IHF '78)
CD/TUNER/AUX/TAPE ..... 101 dB (IHF '66)
85 dB (IHF '78)
PHONO (MM) ..... 60 dB (DIN, 50 mW output)
CD/TUNER/AUX/TAPE ..... 60 dB (DIN, 50 mW output)
Input sensitivity/impedance
PHONO (MM) ..... 2.5 mV/47 kΩ
PHONO (MC) ..... 0.2 mV/100 Ω
CD/TUNER/AUX/TAPE ..... 200 mV/47 kΩ
Tone control
BASS ..... ±10 dB (at 100 Hz)
TREBLE ..... ±10 dB (at 10 kHz)
Loudness control
VOLUME at –30 dB level ..... +6 dB (100 Hz),
+3 dB (10 kHz)
Output level/impedance
TAPE REC ..... 200 mV/1 kΩ

General

Power consumption ..... 160 W
AC outlets
SWITCHED ..... 3; (Total 200 W max.)
Dimensions ..... W: 440 mm (17-5/16")
H: 136 mm (5-3/8")
D: 350 mm (13-3/4")
Weight (net) ..... 6.9 kg (15.2 lb)

KA-2050R

Continuous rated power output
(DIN) 1 kHz, at 8 Ω ..... 35 W + 35 W
at 4 Ω ..... 45 W + 45 W
(IEC/NF) From 63 Hz to 12,500 Hz, 0.7% T.H.D.
at 8 Ω ..... 35 W + 35 W
at 4 Ω ..... 40 W + 40 W
Dynamic power ..... 45 W (8 Ω)
50 W (6 Ω)
60 W (4 Ω)
70 W (2 Ω)
Damping factor ..... 40 (50 Hz)
Total harmonic distortion 0.05%
(20 Hz ~ 20,000 Hz, 30 W, 8 Ω)
0.02% (1 kHz, 30 W, 8 Ω)
Intermodulation distortion ..... 0.05% (30 W, 8 Ω)
(70 Hz : 7 kHz = 4:1)
Frequency response
CD ..... 5 Hz ~ 90 kHz, +0 dB, –3 dB
PHONO 'RIAA' response ..... 20 Hz ~ 20 kHz,
+0.3 dB, –0.3 dB
Maximum input level
PHONO (MM) ..... 130 mV, 0.5% T.H.D. at 1 kHz
Signal to noise ratio
PHONO (MM) ..... 77 dB (IHF '66)
80 dB (IHF '78)
CD/TUNER/AUX/TAPE ..... 101 dB (IHF '66)
85 dB (IHF '78)
PHONO (MM) ..... 58 dB (DIN, 50 mW output)
CD/TUNER/AUX/TAPE ..... 60 dB (DIN, 50 mW output)
Input sensitivity/impedance
PHONO (MM) ..... 2.5 mV/47 kΩ
CD/TUNER/AUX/TAPE ..... 200 mV/47 kΩ
Tone control
BASS ..... ±10 dB (at 100 Hz)
TREBLE ..... ±10 dB (at 10 kHz)
Loudness control
VOLUME at –30 dB level ..... +6 dB (100 Hz),
+3 dB (10 kHz)
Output level/impedance
TAPE REC ..... 200 mV/1 kΩ

General

Power consumption ..... 120 W
AC outlets
SWITCHED ..... 3; (Total 200 W max.)
Dimensions ..... W: 440 mm (17-5/16")
H: 136 mm (5-3/8")
D: 350 mm (13-3/4")
Weight (net) ..... 6.0 kg (13.2 lb)

KA-2050R/3050R

SPECIFICATIONS (For other countries)

KA-3050R

Continuous rated power output
(IHF '66) From 20 Hz to 20,000 Hz 0.05% T.H.D.
at 8 Ω ..... 45 W + 45 W
(IEC/NF) From 63 Hz to 12,500 Hz, 0.7% T.H.D.
at 8 Ω ..... 55 W + 55 W
at 4 Ω ..... 70 W + 70 W
Dynamic power ..... 65 W (8 Ω)
70 W (6 Ω)
85 W (4 Ω)
100 W (2 Ω)
Damping factor ..... 40 (50 Hz)
Total harmonic distortion 0.05%
(20 Hz ~ 20,000 Hz, 45 W, 8 Ω)
0.02% (1 kHz, 45 W, 8 Ω)
Intermodulation distortion ..... 0.05% (45 W, 8 Ω)
(70 Hz : 7 kHz = 4:1)
Frequency response
CD ..... 5 Hz ~ 90 kHz, +0 dB, –3 dB
PHONO 'RIAA' response ..... 20 Hz ~ 20 kHz,
+0.3 dB, –0.3 dB
Maximum input level
PHONO (MM) ..... 130 mV, 0.5% T.H.D. at 1 kHz
PHONO (MC) ..... 10 mV, 0.5% T.H.D. at 1 kHz
Signal to noise ratio
PHONO (MM) ..... 87 dB (IHF '66)
82 dB (IHF '78)
PHONO (MC) ..... 67 dB (IHF '66)
75 dB (IHF '78)
CD/TUNER/AUX/TAPE ..... 101 dB (IHF '66)
85 dB (IHF '78)
Input sensitivity/impedance
PHONO (MM) ..... 2.5 mV/47 kΩ
PHONO (MC) ..... 0.2 mV/100 Ω
CD/TUNER/AUX/TAPE ..... 200 mV/47 kΩ
Tone control
BASS ..... ±10 dB (at 100 Hz)
TREBLE ..... ±10 dB (at 10 kHz)
Loudness control
VOLUME at –30 dB level ..... +6 dB (100 Hz),
+3 dB (10 kHz)
Output level/impedance
TAPE REC ..... 200 mV/1 kΩ

General

Power consumption ..... 160 W
AC outlets
SWITCHED ..... 3; (Total 200 W max.)
For Australia 2; (Total 200 W max.)
Dimensions ..... W: 440 mm (17-5/16")
H: 136 mm (5-3/8")
D: 350 mm (13-3/4")
Weight (net) ..... 6.9 kg (15.2 lb)

KA-2050R

Continuous rated power output
(IHF '66) From 20 Hz to 20,000 Hz 0.05% T.H.D.
at 8 Ω ..... 30 W + 30 W
(IEC/NF) From 63 Hz to 12,500 Hz, 0.7% T.H.D.
at 8 Ω ..... 35 W + 35 W
at 4 Ω ..... 40 W + 40 W
Dynamic power ..... 45 W (8 Ω)
50 W (6 Ω)
60 W (4 Ω)
70 W (2 Ω)
Damping factor ..... 40 (50 Hz)
Total harmonic distortion 0.05%
(20 Hz ~ 20,000 Hz, 30 W, 8 Ω)
0.02% (1 kHz, 30 W, 8 Ω)
Intermodulation distortion ..... 0.05% (30 W, 8 Ω)
(70 Hz : 7 kHz = 4:1)
Frequency response
CD ..... 5 Hz ~ 90 kHz, +0 dB, –3 dB
PHONO 'RIAA' response ..... 20 Hz ~ 20 kHz,
+0.3 dB, –0.3 dB
Maximum input level
PHONO (MM) ..... 130 mV, 0.5% T.H.D. at 1 kHz
Signal to noise ratio
PHONO (MM) ..... 77 dB (IHF '66)
80 dB (IHF '78)
CD/TUNER/AUX/TAPE ..... 101 dB (IHF '66)
85 dB (IHF '78)
Input sensitivity/impedance
PHONO (MM) ..... 2.5 mV/47 kΩ
CD/TUNER/AUX/TAPE ..... 200 mV/47 kΩ
Tone control
BASS ..... ±10 dB (at 100 Hz)
TREBLE ..... ±10 dB (at 10 kHz)
Loudness control
VOLUME at –30 dB level ..... +6 dB (100 Hz),
+3 dB (10 kHz)
Output level/impedance
TAPE REC ..... 200 mV/1 kΩ

General

Power consumption ..... 120 W
AC outlets
SWITCHED ..... 3; (Total 200 W max.)
For Australia 2; (Total 200 W max.)
Dimensions ..... W: 440 mm (17-5/16")
H: 136 mm (5-3/8")
D: 350 mm (13-3/4")
Weight (net) ..... 6.0 kg (13.2 lb)

Kenwood follows a policy of continuous advancements in development.
For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement.
Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an.
Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

Note:

Component and circuitry are subject to modification to insure best operation under differing local conditions. This manual is based on the general market (M) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION
Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku. Tokyo 150. Japan

KENWOOD U.S.A. CORPORATION
2201 East Dominguez Street, Long Beach CA 90810;
550 Clark Drive, Mount Olive, NJ 07828, U.S.A.

KENWOOD ELECTRONICS CANADA INC.
6070 KESTREL ROAD MISSISSAUGA, ONTARIO L 5 T 1S8

TRIO-KENWOOD U.K. LIMITED
KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.
Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrucker-Str. 15, 6056 Heusenstamm, Germany

TRIO-KENWOOD FRANCE S.A.
13 Boulevard Ney. 75018 Paris, France

KENWOOD LINEAR S.p.A.
20125, MILANO-VIA ARBE, 50, ITALY

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD (A.C.N 001 499 074)
P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.
Wang Kee Bulding, 4th Floor, 34-37. Connaught Road. Central. Hong Kong